


DANIELE CHANDELIER

INSTALLATION INSTRUCTIONS

1 OF 7

BARONCELLI ⌘

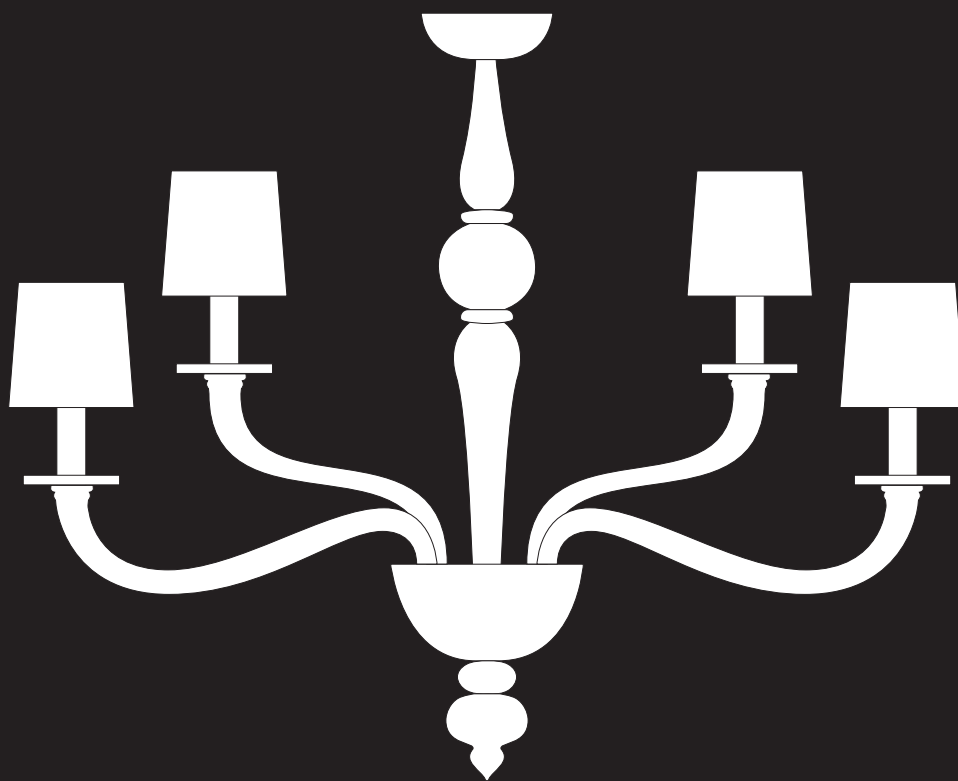

WHAT IS INCLUDED

1. Ceiling canopy
2. Chain
3. Spares

WHAT YOU WILL NEED


1. Hook / Junction box fixings
2. Bulbs - E14 (240v) / E12 (120v) - Max 60W
3. Screwdriver (3.5mm / 1/8" flat tip) + pliers
4. Soft cloth

WEIGHTS

10 Lights 20kg (45LB)

DANIELE CHANDELIER INSTALLATION INSTRUCTIONS 2 OF 7


BARONCELLI ⌘

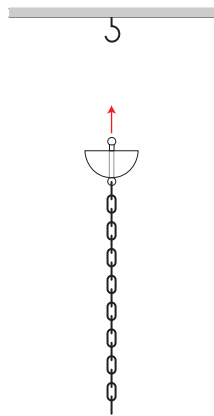

STEP 1

Using a heavy-duty hook secured firmly into a joist, hook the ceiling canopy and chain. Ensure hook is capable of taking the required weight.


NOTE: CEILING HOOK IS NOT SUPPLIED



STEP 1 (U.S)


Securely fasten bracket bar to the junction box. Pass the stem through the bracket bar and secure using nuts above and below. Ensure the fixing is capable of taking the required weight.

NOTE: BRACKET IS NOT SUPPLIED

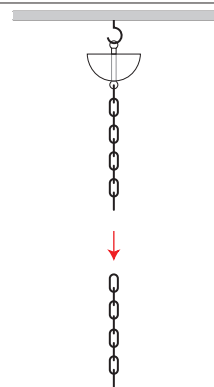

STEP 2

Remove excess chain to determine full drop.

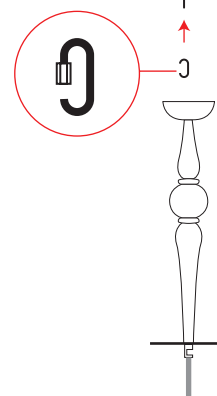

STEP 3


Use shackle to hook the stem to the chain.

DANIELE CHANDELIER

INSTALLATION INSTRUCTIONS


3 OF 7

BARONCELLI ⌘

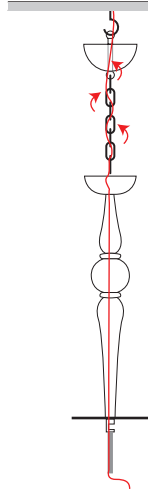


STEP 4

Thread cable up the length of the stem, thread it through the chain and post up through the tube and into the ceiling canopy. Make electrical connection.

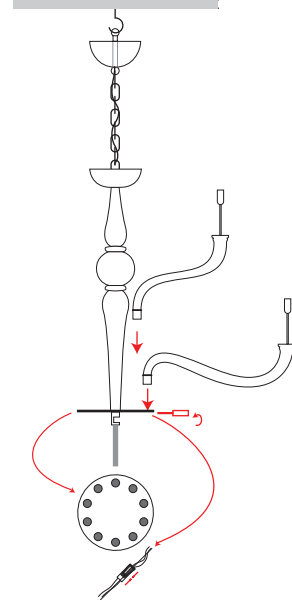


STEP 5

Install the arms into their corresponding sockets within the fondino plate. Secure into the socket below the plate and make electricals using 'click' connectors.

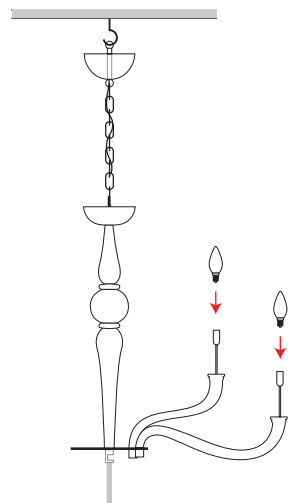

STEP 6

Install bulbs before testing electrics.

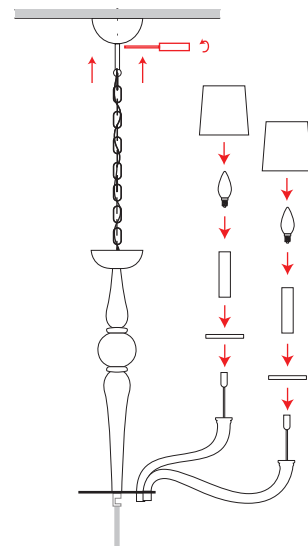

STEP 7


Raise ceiling canopy and secure in position. Install cup, candle sleeve and bulb onto each arm. Insert detail elements.

OPERATION AND MAINTENANCE

ENSURE ANY ELECTRICAL WORK IS CARRIED OUT BY A QUALIFIED ELECTRICIAN


5 OF 7

BARONCELLI 8

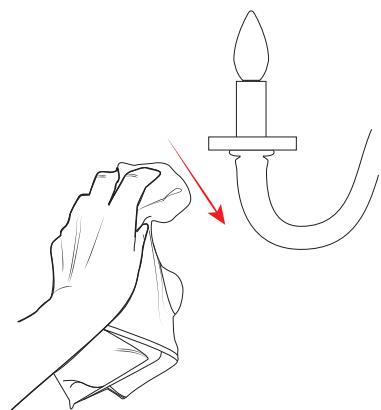


GLASS CLEANING

Glass elements should be carefully cleaned using a soft cloth.

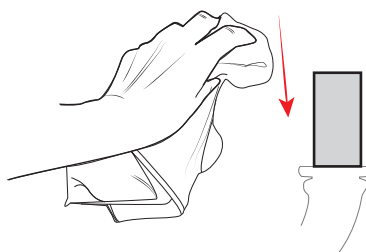


METAL CLEANING

Carefully clean metal surfaces using a soft cloth and no liquid.

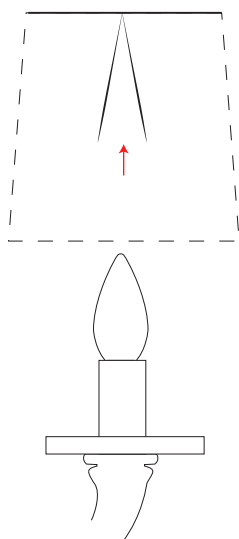

REPLACING A BULB

If shade is in place, remove first, carefully lift until the clip fitting releases itself of the bulb.

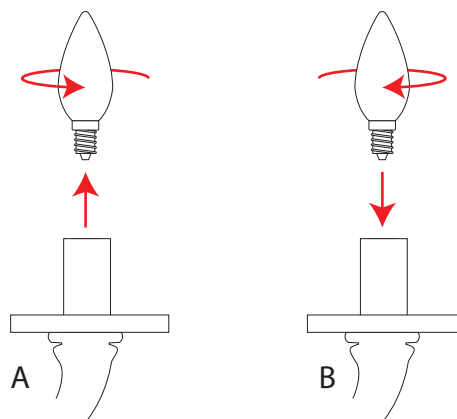

REPLACING A BULB



Ensure electricals are switched off and bulb has cooled down. Remove bulb and replace.

OPERATION AND MAINTENANCE

ENSURE ANY ELECTRICAL WORK IS CARRIED OUT BY A QUALIFIED ELECTRICIAN

6 OF 7

BARONCELLI 8

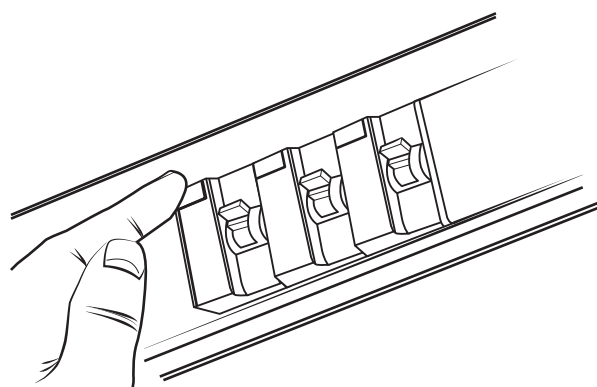
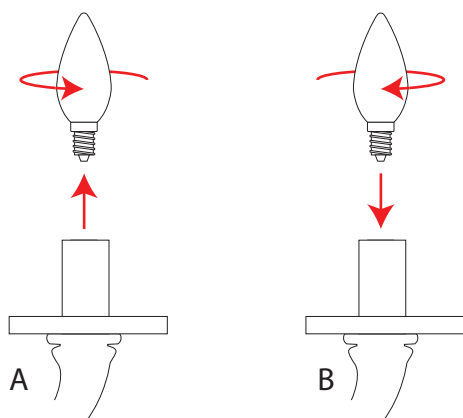


STEP A TROUBLE SHOOTING - ELECTRICAL FAULTS

If only a single bulb is not working, check, remove and replace the bulb.

STEP B TROUBLE SHOOTING - ELECTRICAL FAULTS

Check fusebaord

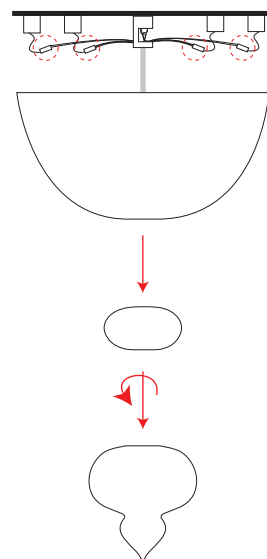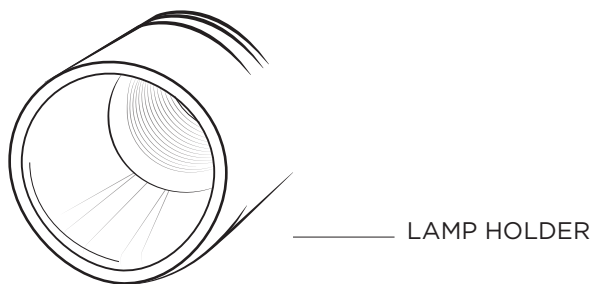

STEP C TROUBLE SHOOTING - ELECTRICAL FAULTS

Check/test lamp holder. Retrace installation steps to access.

STEP D TROUBLE SHOOTING - ELECTRICAL FAULTS


Remove finial and fondino to check/test connections at arm bases.

OPERATION AND MAINTENANCE

ENSURE ANY ELECTRICAL WORK IS CARRIED OUT BY A QUALIFIED ELECTRICIAN

7 OF 7

BARONCELLI 8

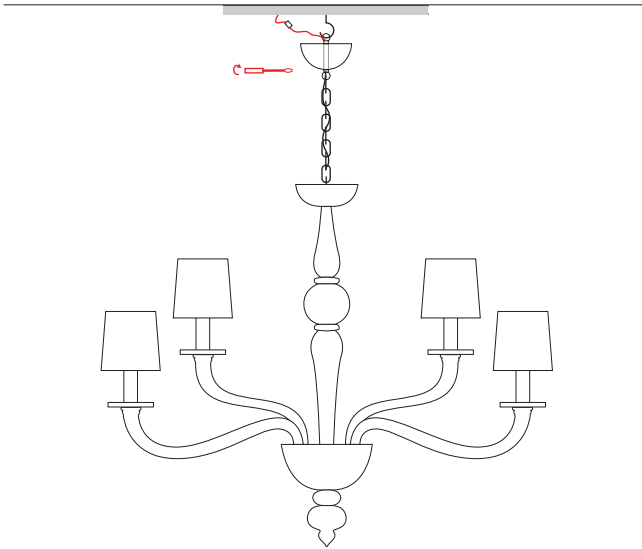

STEP E

TROUBLE SHOOTING - ELECTRICAL FAULTS


Lower ceiling canopy. Check/test connections at arm bases.

DANIELE CHANDELIER

INSTALLATION INSTRUCTIONS

4 OF 7

BARONCELLI 8

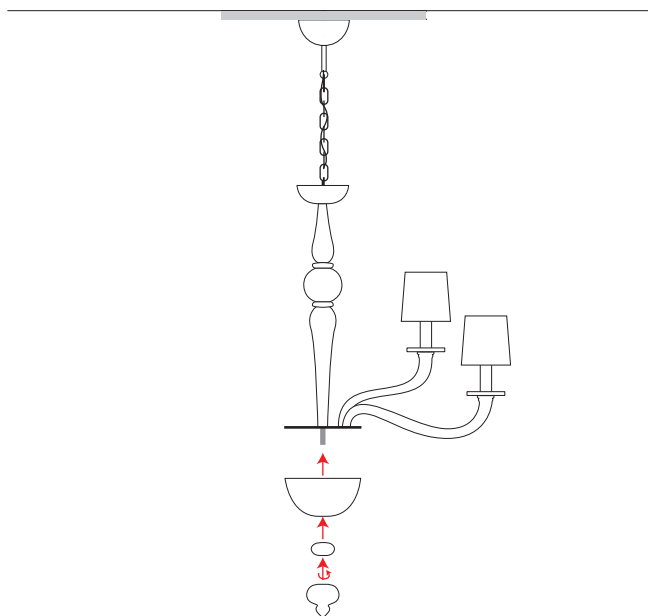

STEP 8

Raise fondino and metal liner into position and secure using finial beneath.