


MARCELLO CHANDELIER

INSTALLATION INSTRUCTIONS

1 OF 7

BARONCELLI ⌘

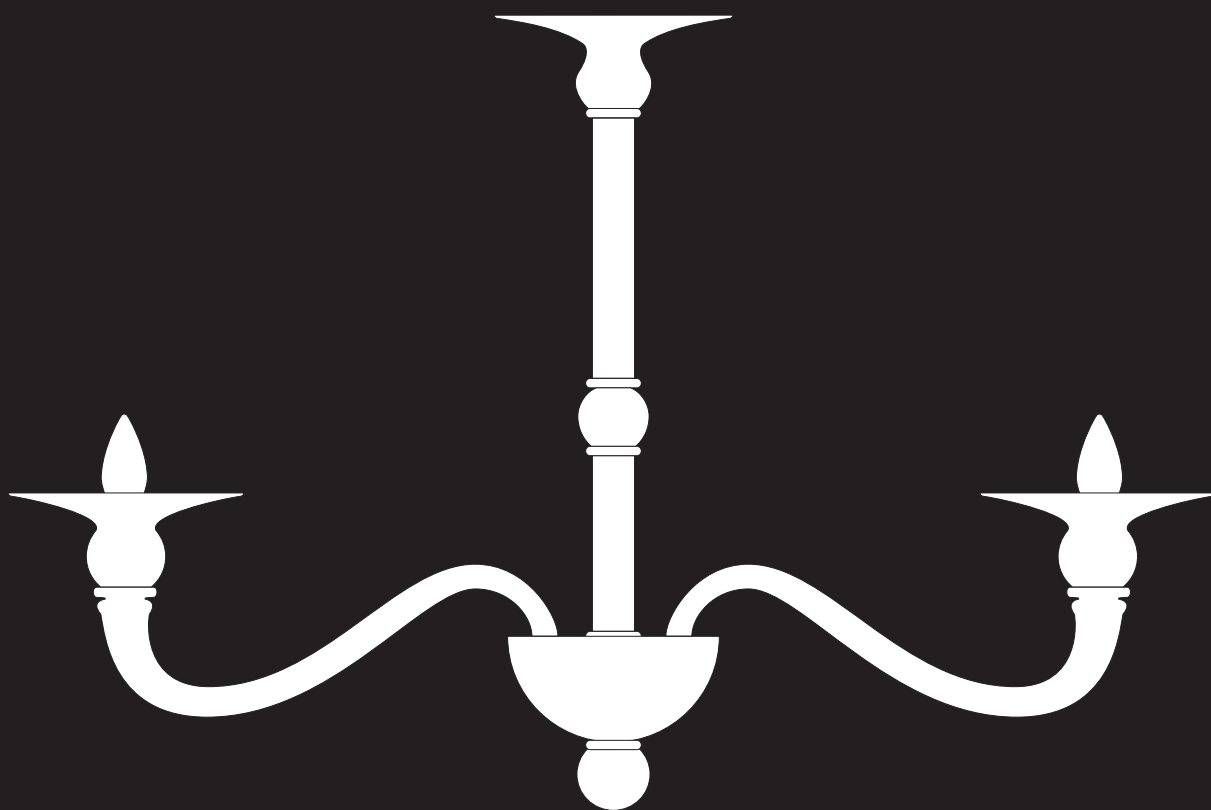

WHAT IS INCLUDED

1. Ceiling canopy
2. Chain
3. Spares

WHAT YOU WILL NEED

1. Hook / Junction box fixings
2. Bulbs - E14 (240v) / E12 (120v) - Max 60W
3. Screwdriver (3.5mm / 1/8" flat tip) + pliers
4. Soft cloth

WEIGHTS



- 5 Lights 12kg (27LB)
- 6 Lights 13kg (29LB)
- 8 Lights 16kg (36LB)

MARCELLO CHANDELIER

INSTALLATION INSTRUCTIONS

2 OF 7

BARONCELLI ⌘





STEP 1

Using a heavy-duty hook secured firmly into a joist, hook the ceiling canopy and chain. Ensure hook is capable of taking the relevant weight.

NOTE: CEILING HOOK IS NOT SUPPLIED

STEP 1 (U.S)

Pass the stem through the bracket bar and secure using nuts above and below. Securely fasten bracket bar to the junction box. Ensure the fixings are capable of the relevant weight.

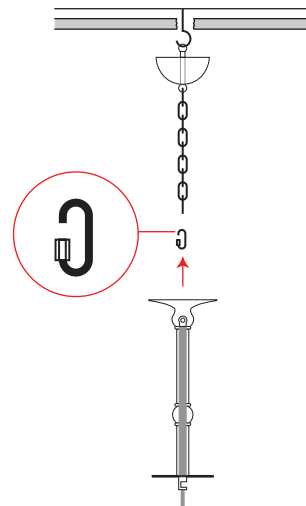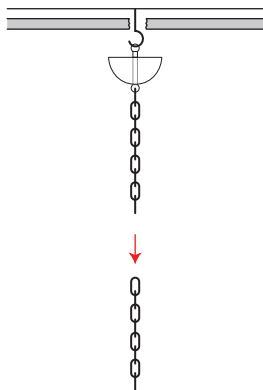

STEP 2

Remove excess chain to determine full drop.

STEP 3


Use shackle to hook the stem to the chain.

MARCELLO CHANDELIER

INSTALLATION INSTRUCTIONS

3 OF 7


BARONCELLI 

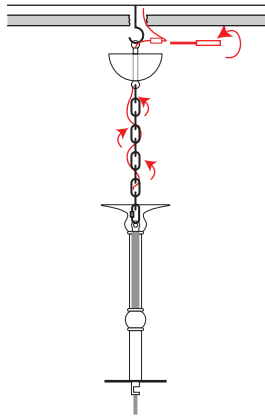

ENSURE ANY ELECTRICAL WORK IS CARRIED OUT BY A QUALIFIED ELECTRICIAN


STEP 4

Thread cable up through the length of the stem, thread it through the chain and post up through the tube into the ceiling canopy. Make electrical connection.

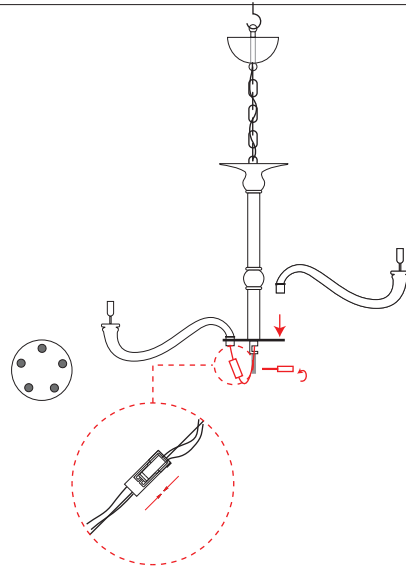

STEP 5

Install the arms into their corresponding sockets within the fondino plate. Secure into the socket below the plate and make electricals using 'click' connectors.

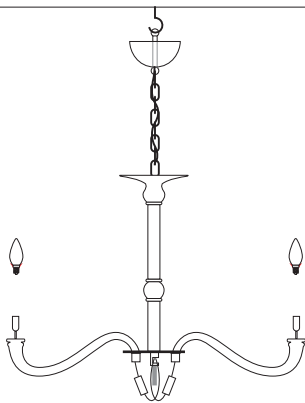

Bulbs - E14 (240v) / E12 (120v) - Max 60W

STEP 6

Install bulbs before testing electrics.

STEP 7


Raise ceiling canopy and secure in position. Install cup, candle sleeve and bulb onto each arm.

MARCELLO CHANDELIER

INSTALLATION INSTRUCTIONS

4 OF 7

BARONCELLI 

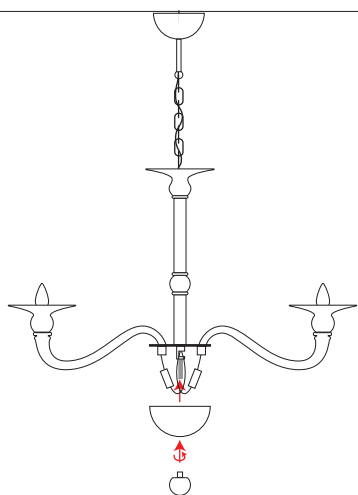

STEP 8


Raise fondino and metal liner into position and secure using finial beneath.

OPERATION AND MAINTENANCE

ENSURE ANY ELECTRICAL WORK IS CARRIED OUT BY A QUALIFIED ELECTRICIAN


5 OF 7

BARONCELLI 

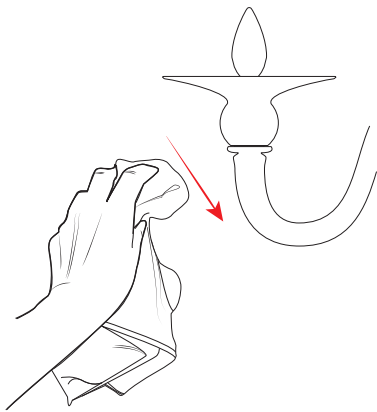


GLASS CLEANING

Glass elements should be carefully cleaned using a soft cloth.

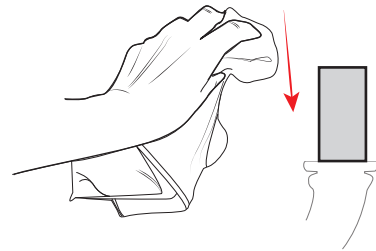

METAL CLEANING

Carefully clean metal surfaces using a soft cloth and no liquid.

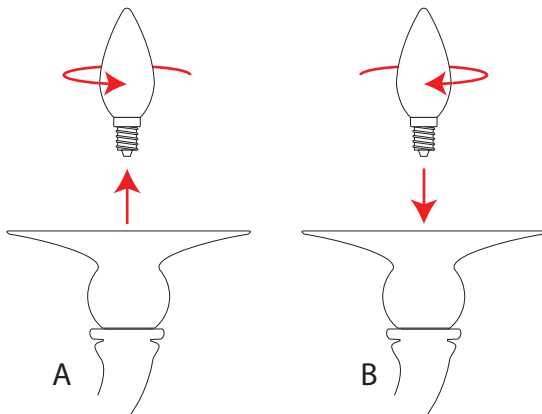

Bulbs - E14 (240v) / E12 (120v) - Max 60W

REPLACING A BULB



Ensure electricals are switched off and bulb has cooled down. Remove bulb and replace.

OPERATION AND MAINTENANCE

ENSURE ANY ELECTRICAL WORK IS CARRIED OUT BY A QUALIFIED ELECTRICIAN

6 OF 7

BARONCELLI

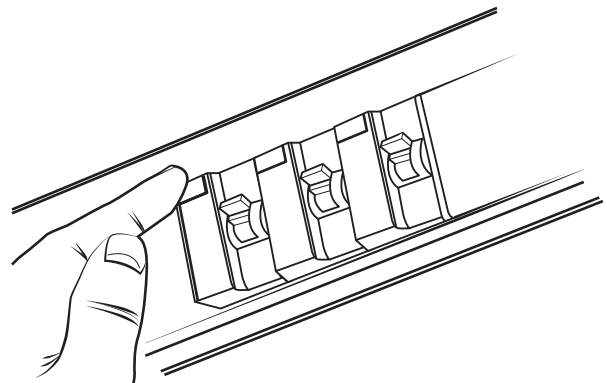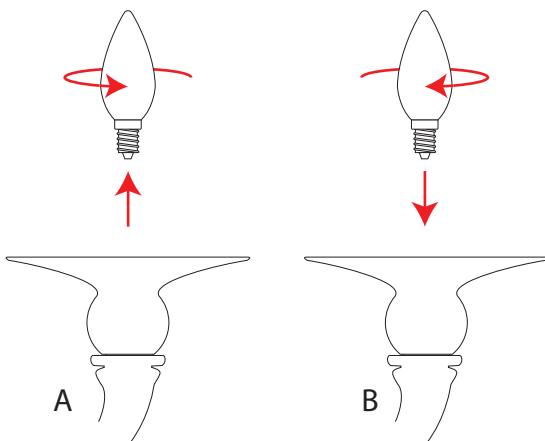


STEP A TROUBLE SHOOTING - ELECTRICAL FAULTS



If only a single bulb is not working, check, remove and replace the bulb.

STEP B TROUBLE SHOOTING - ELECTRICAL FAULTS

Check fuseboard



LAMP HOLDER



STEP C TROUBLE SHOOTING - ELECTRICAL FAULTS

Check/test lamp holder. Retrace installation steps to access.

STEP D TROUBLE SHOOTING - ELECTRICAL FAULTS


Remove finial and fondino to check/test connections at arm bases.

OPERATION AND MAINTENANCE

ENSURE ANY ELECTRICAL WORK IS CARRIED OUT BY A QUALIFIED ELECTRICIAN

7 OF 7

BARONCELLI

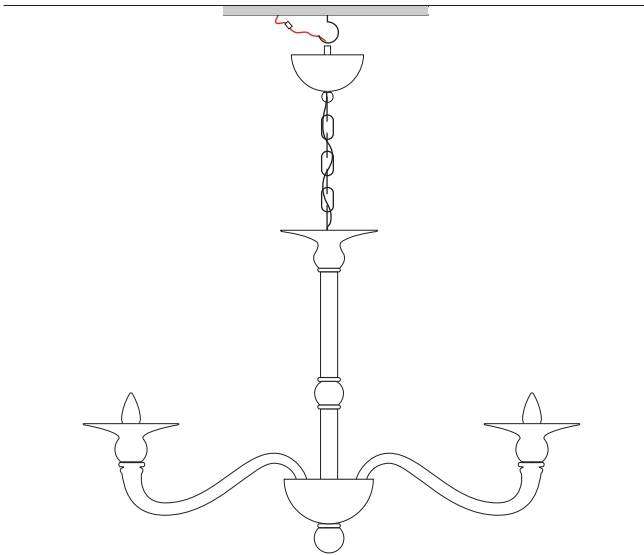

STEP E

TROUBLE SHOOTING - ELECTRICAL FAULTS

Lower ceiling canopy. Check/test connections at arm arm bases.