


ARLO LT 323 PENDANT

INSTALLATION INSTRUCTIONS

1 OF 5

BARONCELLI ⌘

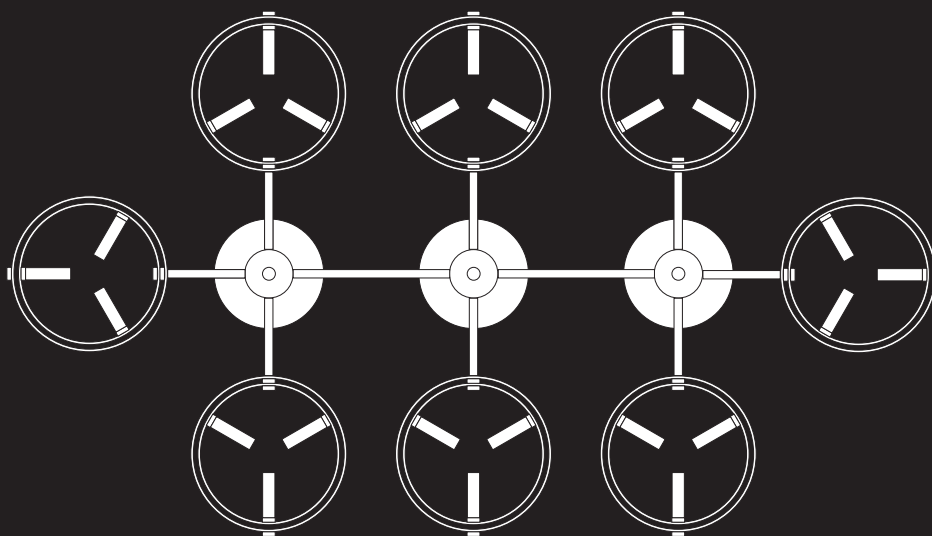

WHAT IS INCLUDED

1. Ceiling canopy
2. Stem
3. Arms
4. LED Drivers

8 Lights

WEIGHT

18kg (40lb)

WHAT YOU WILL NEED


1. Junction box fixings
2. Screwdriver (3.5mm / 1/8" flat tip) + pliers
3. Soft cloth
4. Hex Key

ARLO LT 323 PENDANT

INSTALLATION INSTRUCTIONS

2 OF 5


BARONCELLI ⌘

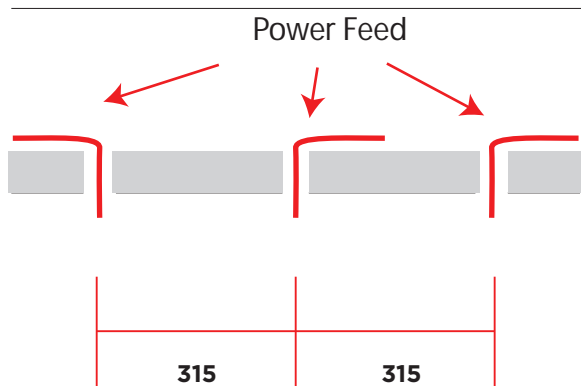

ENSURE ANY ELECTRICAL WORK IS CARRIED OUT BY A QUALIFIED ELECTRICIAN


STEP 1

Set out ceiling fixing locations. Power feed is required at both locations.

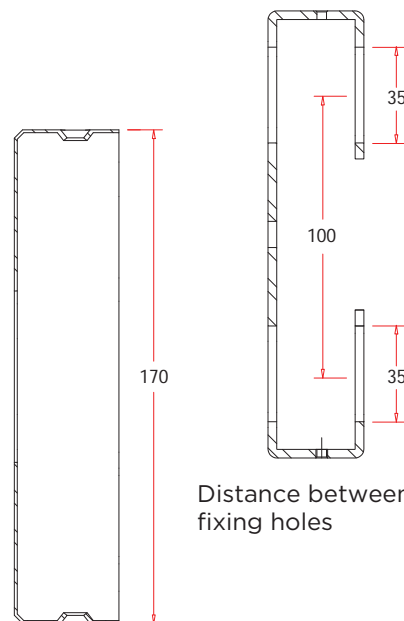


Distance between screw fixing holes

OA diameter of outer case

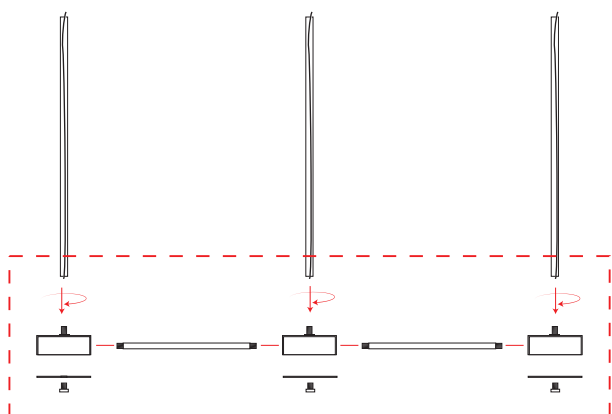

STEP 2

Assemble the central stem. Attach drum spacers to either end of the stem. Pass electrical cable through the drum spacer.

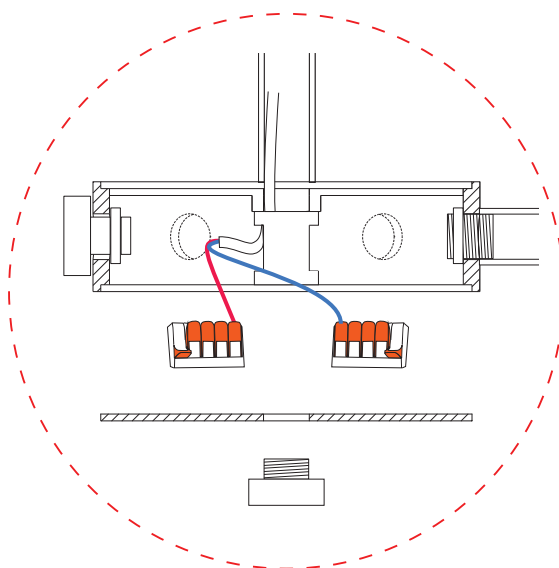


ARLO LT 323 PENDANT


INSTALLATION INSTRUCTIONS

3 OF 5

BARONCELLI ⌘

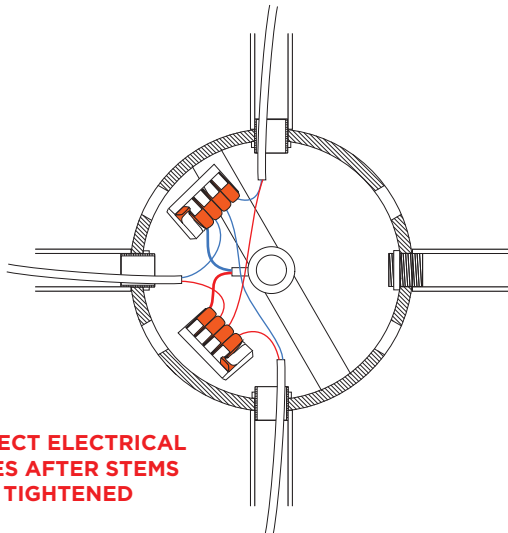

CONNECT ELECTRICAL CABLES AFTER STEMS WERE TIGHTENED

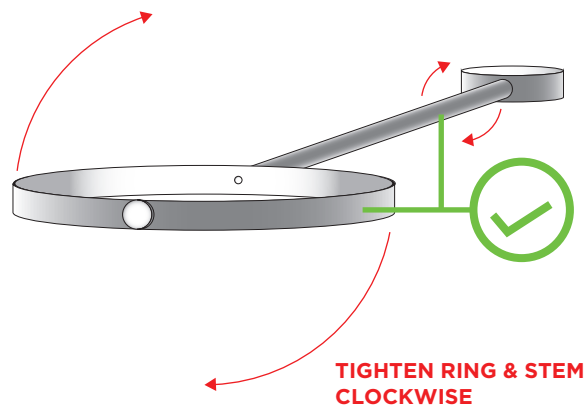


TIGHTEN RING & STEM CLOCKWISE

STEP 4

Attach arms into each drum spacer and secure with hex nuts.

TIGHTENING


Tighten each arm until it is secure into the drum spacer. The stem can be tightened by carefully gripping the ring to turn.

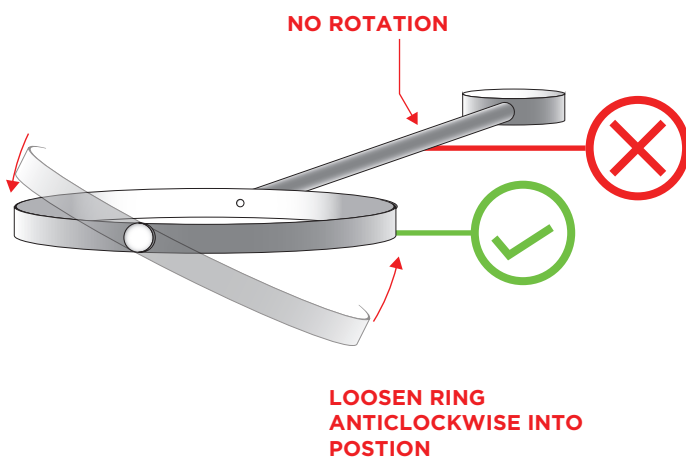

LOOSEN RING
ANTICLOCKWISE INTO
POSITION

TIGHTENING

If once tightened the ring is not in the appropriate position this can be loosened slightly to achieve this. When loosening, only the ring should be rotated, the stem must remain in position tightened against the drum spacer.

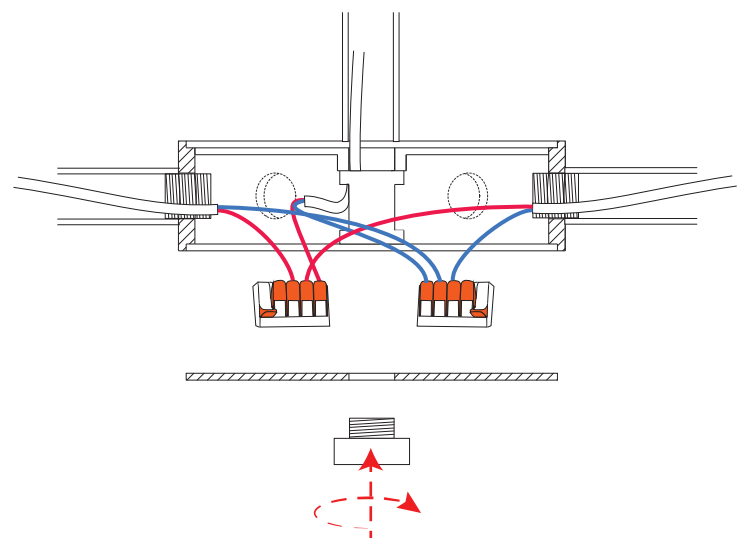

STEP 5



Connect electrical cables. Close the fascia plate.

ARLO LT 323 PENDANT

INSTALLATION INSTRUCTIONS

4 OF 5


BARONCELLI ⌘

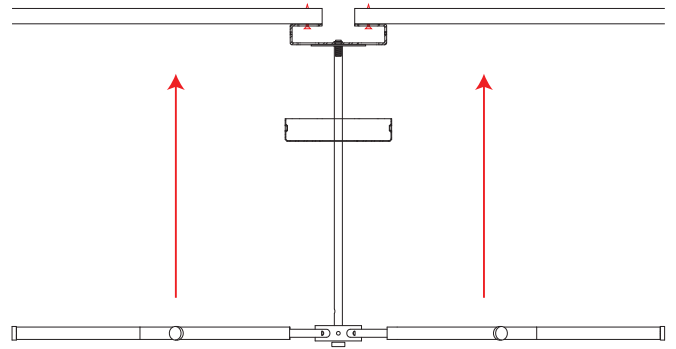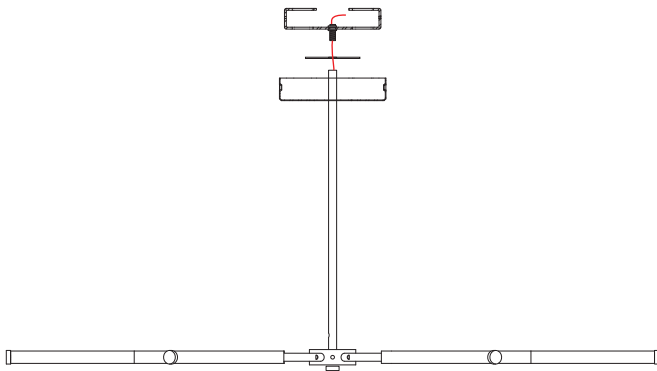

NOTE: SCREW FIXINGS ARE NOT SUPPLIED
This step will take minimum of two people.


STEP 6

Pass each stems through ceiling canopy.
Slide the cover plate between stem and ceiling bracket.
Pass the electrical cable through ceiling bracket and secure.

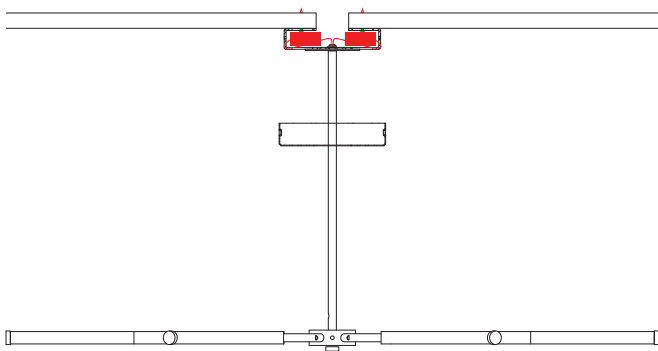

STEP 7

Raise pendant.
Securely fix canopies to ceiling beam or joist (junction box for US) located centrally to the fittings intended position. Ensure the fixing is capable of taking the relevant load.

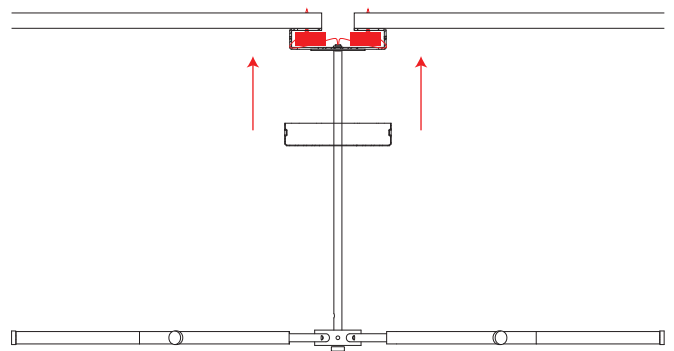

***ENSURE ANY ELECTRICAL WORK IS CARRIED OUT
BY A QUALIFIED ELECTRICIAN***

STEP 8

Make electrical connection. This product require LED driver. Check wattage and driver qty.


STEP 9

Test the electrical connections and secure the outer casings into position.

OPERATION AND MAINTENANCE


5 OF 5

BARONCELLI ⌘

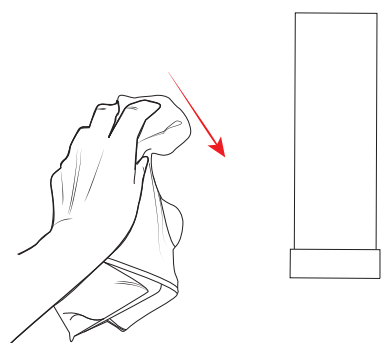


GLASS CLEANING

Glass elements should be carefully cleaned using a soft cloth.

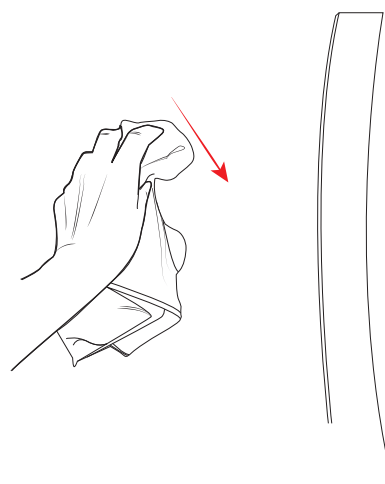


METAL CLEANING

Carefully clean metal surfaces using a soft cloth and no liquid.

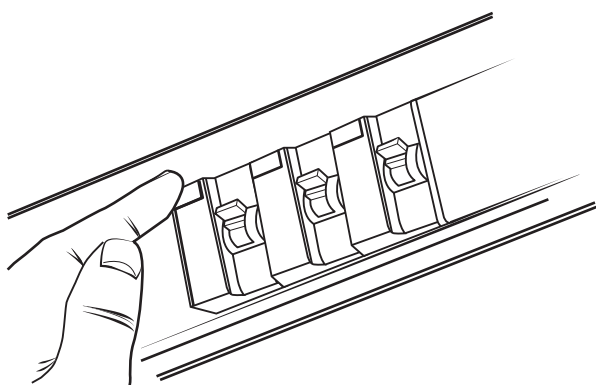

STEP A
TROUBLE SHOOTING - ELECTRICAL FAULTS
Check fusebaord

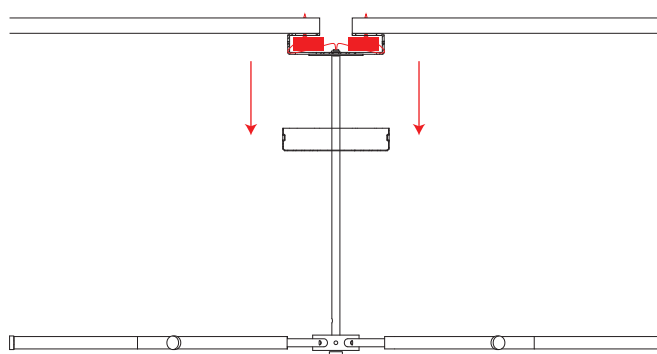

STEP B
TROUBLE SHOOTING - ELECTRICAL FAULTS
Lower ceiling canopy. Check/test connections.