


# ARLO LT 55

## INSTALLATION INSTRUCTIONS

### 1 OF 6

BARONCELLI ⌘

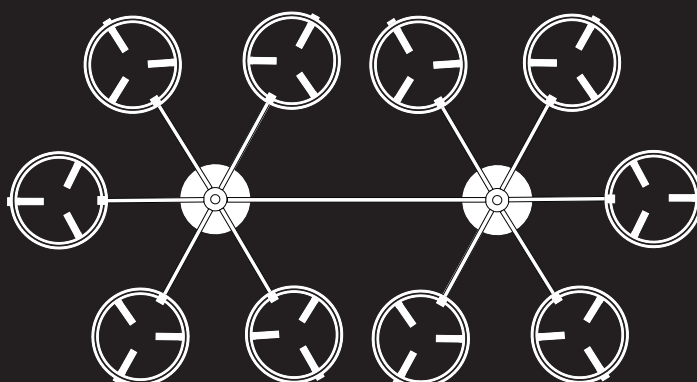

#### WHAT IS INCLUDED

1. Ceiling canopy
2. Stem
3. Arms
4. LED Drivers

10 Lights

#### WEIGHT

18kg (40lb)

#### WHAT YOU WILL NEED


1. Junction box fixings
2. Screwdriver (3.5mm / 1/8" flat tip) + pliers
3. Soft cloth
4. Hex Key

# ARLO LT 55

## INSTALLATION INSTRUCTIONS

### 2 OF 6


BARONCELLI ⌘

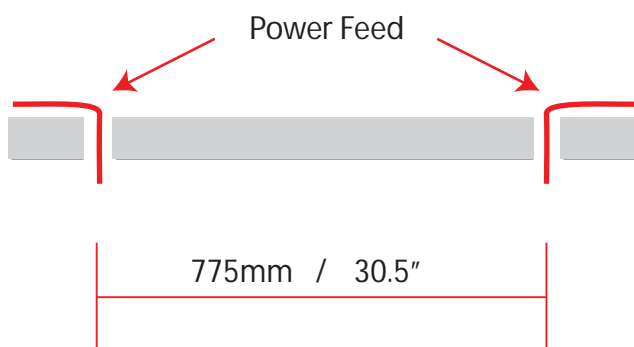

**\*ENSURE ANY ELECTRICAL WORK IS CARRIED OUT BY A QUALIFIED ELECTRICIAN\***


#### STEP 1

Set out ceiling fixing locations. Power feed is required at both locations.

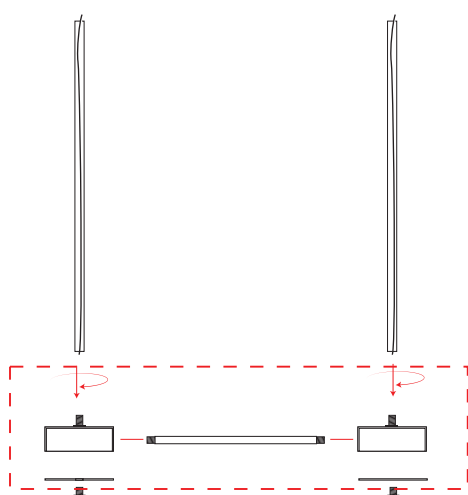

#### STEP 2

Assemble the central stem. Attach drum spacers to either end of the stem. Pass electrical cable through the drum spacer.

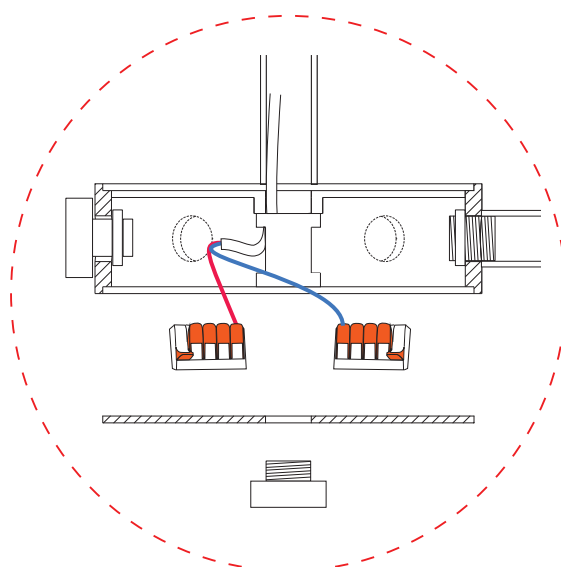


# ARLO LT 55

## INSTALLATION INSTRUCTIONS


### 3 OF 6

BARONCELLI ⌘

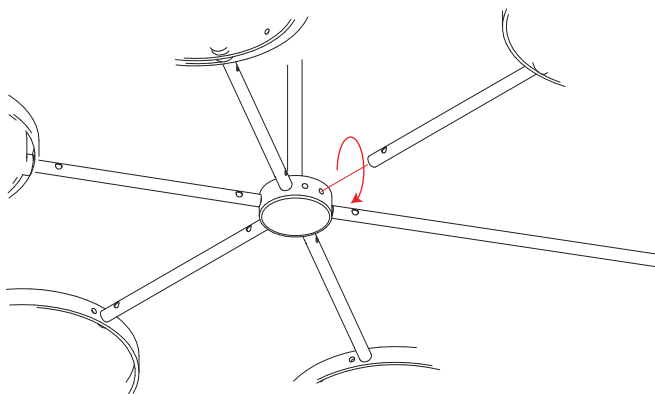


#### STEP 4

Attach arms into each drum spacer and secure with hex nuts.

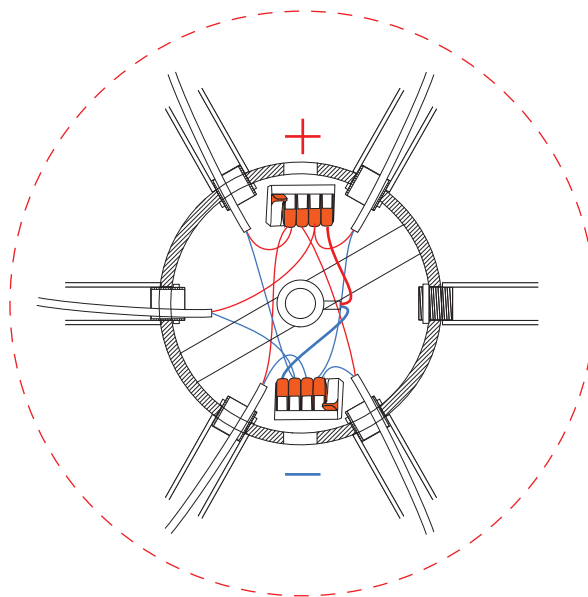

**CONNECT ELECTRICAL  
CABLES AFTER STEMS  
WERE TIGHTENED**

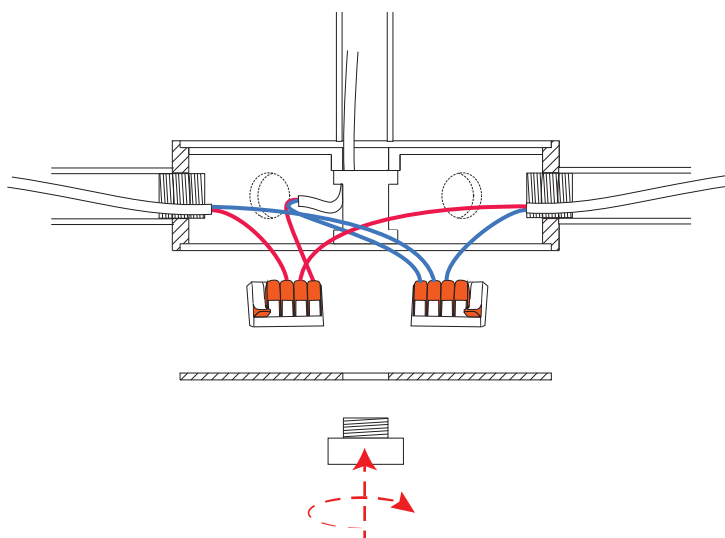

#### STEP 5


Close the fascia plate using the endcap. Screw the endcap into the hickey to secure.

# ARLO LT 55

## INSTALLATION INSTRUCTIONS

### 4 OF 6

BARONCELLI ®

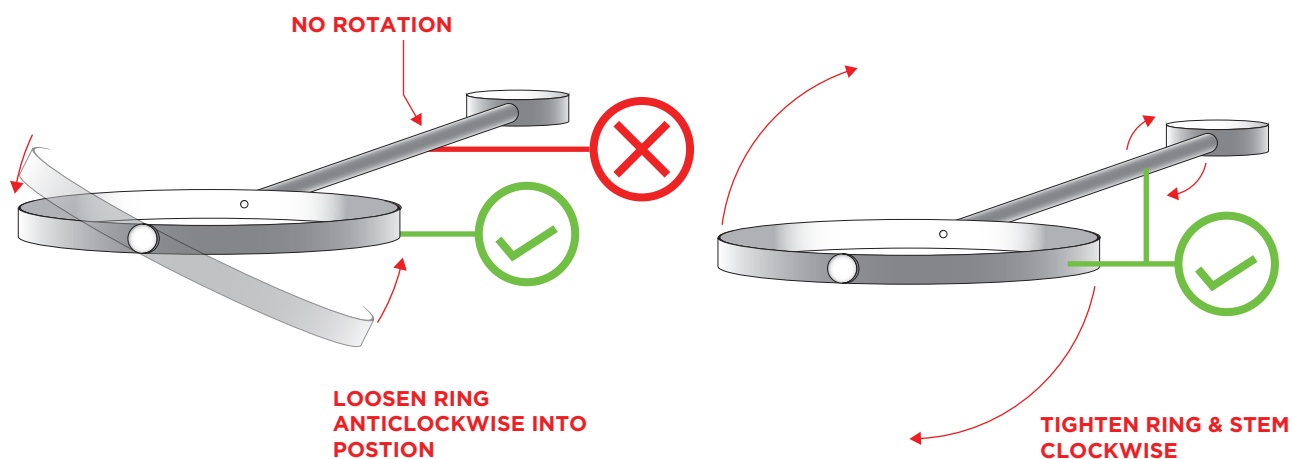

#### TIGHTENING

If once tightened the ring is not in the appropriate position this can be loosened slightly to achieve this. When loosening, only the ring should be rotated, the stem must remain in position tightened against the drum spacer.

#### TIGHTENING



Tighten each arm until it is secure into the drum spacer. The stem can be tightened by carefully gripping the ring to turn.

# ARLO LT 55

## INSTALLATION INSTRUCTIONS

### 5 OF 6

BARONCELLI ⌘

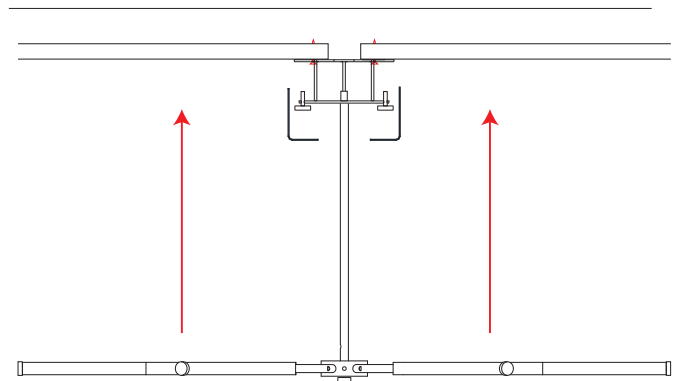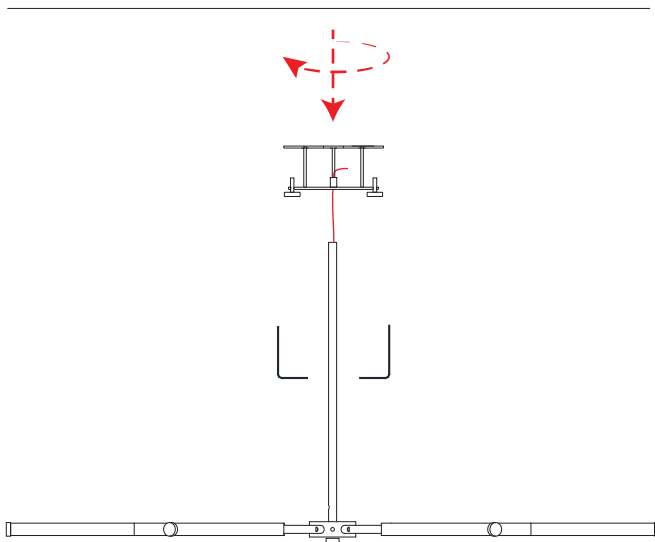



NOTE: SCREW FIXINGS ARE NOT SUPPLIED  
This step will take minimum of two people.

#### STEP 6

Pass each stems through ceiling canopy.  
Slide the cover plate between stem and ceiling bracket.  
Pass the electrical cable through ceiling bracket and secure.

#### STEP 7

Raise pendant.  
Securely fix canopies to ceiling beam or joist (junction box for US) located centrally to the fittings intended position. Ensure the fixing is capable of taking the relevant load.

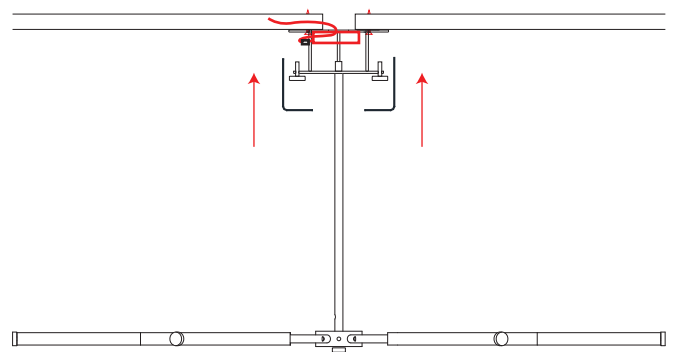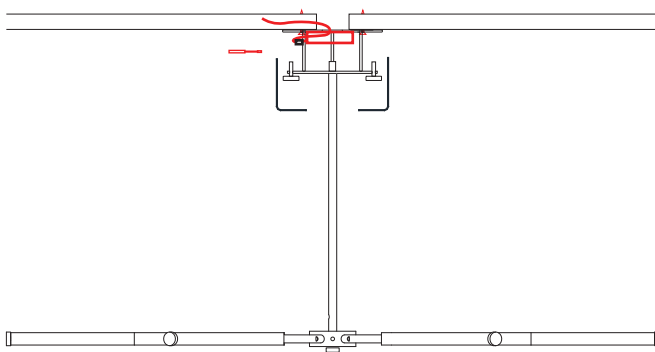

**\*ENSURE ANY ELECTRICAL WORK IS CARRIED OUT  
BY A QUALIFIED ELECTRICIAN\***

#### STEP 8

Make electrical connection. This product require LED driver. Check wattage and driver qty.


#### STEP 9

Test the electrical connections and secure the outer casings into position.

# OPERATION AND MAINTENANCE


## 6 OF 6

BARONCELLI 8

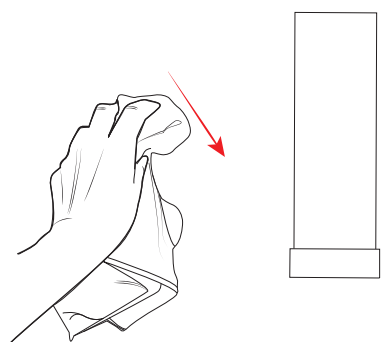


### GLASS CLEANING

Glass elements should be carefully cleaned using a soft cloth.

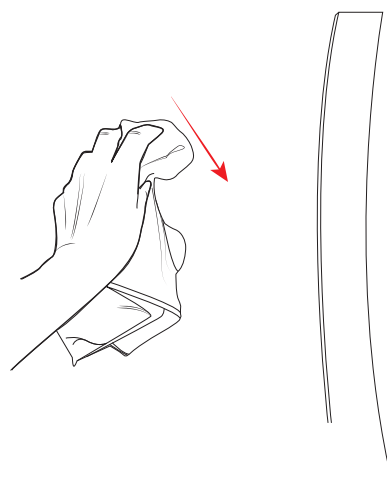


### METAL CLEANING

Carefully clean metal surfaces using a soft cloth and no liquid.

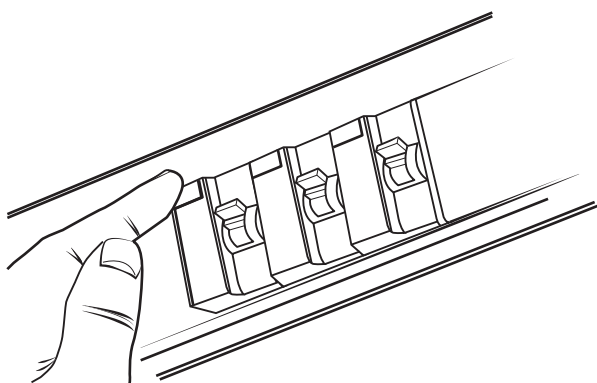

**STEP A**  
**TROUBLE SHOOTING - ELECTRICAL FAULTS**  
Check fuseboard

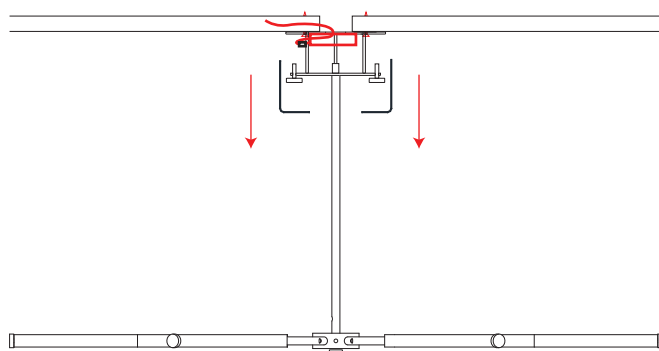

**STEP B**  
**TROUBLE SHOOTING - ELECTRICAL FAULTS**  
Lower ceiling canopy. Check/test connections.