

**POLARIS
PENDANT**

BARONCELLI



IMAGE SHOWS

Satin gold with opaque glass spheres





POLARIS PENDANT FACTS



MATERIALS

GLASS

Opaque sphere

GLASS COLOURS



CRI

METAL FINISHES

Satin gold



OTHER FINISHES

Suspension cable in satin steel

WEIGHTS

Polaris 3	5 kg (11 lb)
Polaris 4	6 kg (12 lb)
Polaris 6	11 kg (24 lb)
Polaris 8	12 kg (26 lb)

SIZES

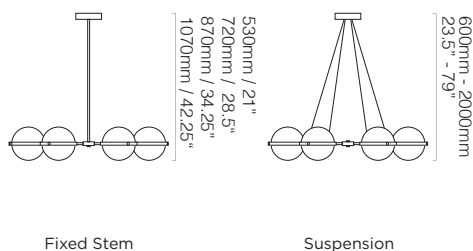

DETAILS

SUSPENSION

Overall drop can be adjusted on site when using suspension cables, but cannot not be adjusted when using central stem.

Supplied with ceiling canopy Ø170 (6.75"), Ø190 (7.5") for USA or when using suspension cables.

FIXING

Ceiling bracket with 2 fixing slots provided (fixings not included). Ceiling bracket is suitable for use with a 3.5" octagonal junction box. Please ensure fixings and junction box are suitable to carry the weight indicated.

INSTALLATION

Fixture requires on site assembly by qualified electrician.

ELECTRICALS

LAMP

240V/120V Warm white LED tape (2600K)

Polaris 3	1500Lm
Polaris 4	2000Lm
Polaris 6	3000Lm
Polaris 8	4050Lm

POWER

24V LED tape with power output of:

Polaris 3	21W
Polaris 4	28W
Polaris 6	42W
Polaris 8	56W

Supplied with 24V constant voltage mains dimmable transformers. Trailing edge dimming is recommended for best results. Transformers are housed within ceiling canopy.

Full transformer specification available upon request.

1-10v and DALI dimming options are available by request, requires an additional cable circuit to be provided, please consult your electrician for suitability.

STANDARD

All lighting is made to CE standards. LED tape and transformer UL recognised.

CONTACT US

PRODUCTION AND LOGISTICS

Via Dei Ronchi 19
Padova 35127
production@baroncelli.com

SALES OFFICES

London +44 (20) 7720 6556
New York +1 212 255 2005
studio@baroncelli.com

BARONCELLI.COM

