

**POLARIS LT
PENDANT**

BARONCELLI





POLARIS LT PENDANT FACTS



MATERIALS

GLASS

Opaque sphere

GLASS COLOURS



CRI


METAL FINISHES

Satin gold

WEIGHTS

Polaris LT 33	10 kg (22 lb)
Polaris LT 323	12 kg (27 lb)
Polaris LT 3223	14 kg (31 lb)
Polaris LT 55	14 kg (31 lb)
Polaris LT 545	20 kg (44 lb)

SIZES

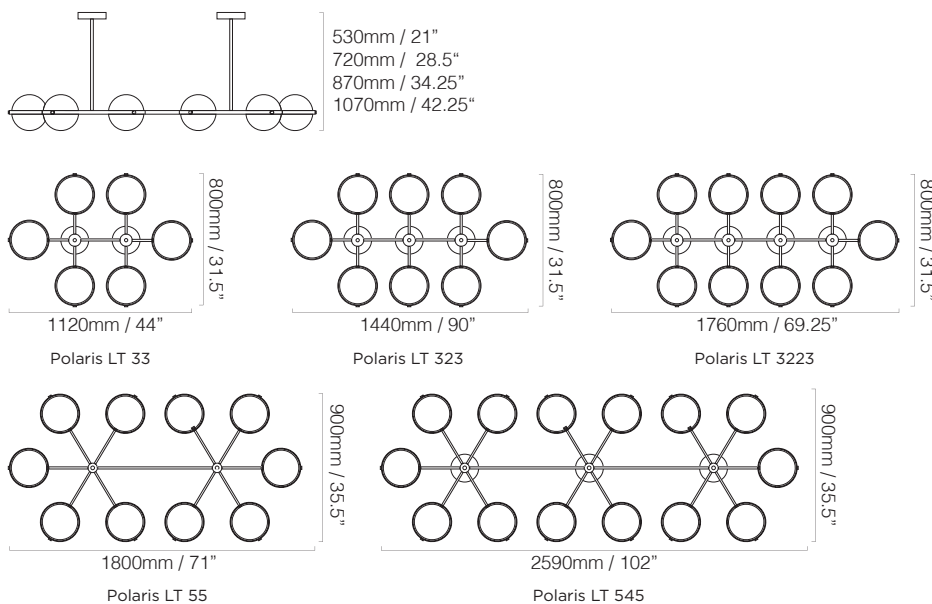

DETAILS

SUSPENSION

Overall drop can be extended in 240mm (9.5") increments at an additional cost. Please specify any additional stem heights at time of order. Supplied with ceiling canopies Ø170 (6.75"), Ø190 (7.5") for USA.

FIXING

Ceiling bracket with 2 fixing slots provided (fixings not included). Ceiling bracket is suitable for use with a 3.5" octagonal junction box. Please ensure fixings and junction box are suitable to carry the weight indicated.

INSTALLATION

Fixture requires on site assembly by qualified electrician.

Requires a separate cable feed per stem.

ELECTRICALS

LAMP

240V/120V Warm white LED tape (2600K)	
Polaris LT 33	3300Lm
Polaris LT 323	4400Lm
Polaris LT 3223	5500Lm
Polaris LT 55	5500Lm
Polaris LT 545	7700Lm

POWER

24V LED tape with power output of:

Polaris LT 33	42W
Polaris LT 323	56W
Polaris LT 3223	70W
Polaris LT 55	70W
Polaris LT 545	98W

Supplied with 24V constant voltage mains dimmable transformers. Trailing edge dimming is recommended for best results. Transformers are housed within ceiling canopy.

Full transformer specification available upon request. circuit to be provided, please consult your electrician for suitability.

STANDARD

All lighting is made to CE standards. LED tape and transformer UL recognised.

CONTACT US

PRODUCTION AND LOGISTICS

Via Dei Ronchi 19
Padova 35127
production@baroncelli.com

SALES OFFICES

London +44 (20) 7720 6556
New York +1 212 255 2005
studio@baroncelli.com

BARONCELLI.COM