


# MICO II PENDANT

## INSTALLATION INSTRUCTIONS

### 1 OF 6

BARONCELLI ⌘

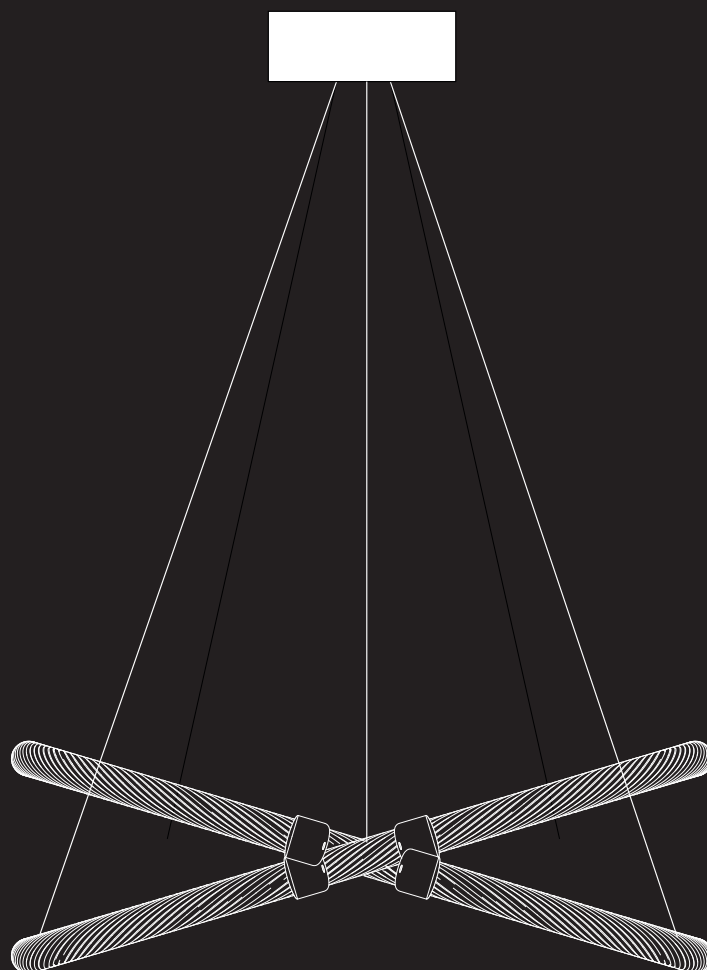

#### WHAT IS INCLUDED

1. Ceiling canopy
2. Suspension cable
3. LED driver

#### WHAT YOU WILL NEED

1. Screws
2. Screwdriver (3.5mm / 1/8" flat tip) + pliers
3. Soft cloth

#### WEIGHTS


400	8kg (18LB)
600	10kg (22LB)
800	14kg (31LB)
1000	20kg(44LB)
1200	28kg(62LB)

# MICO II PENDANT

## INSTALLATION INSTRUCTIONS


### 2 OF 6

BARONCELLI ⌘

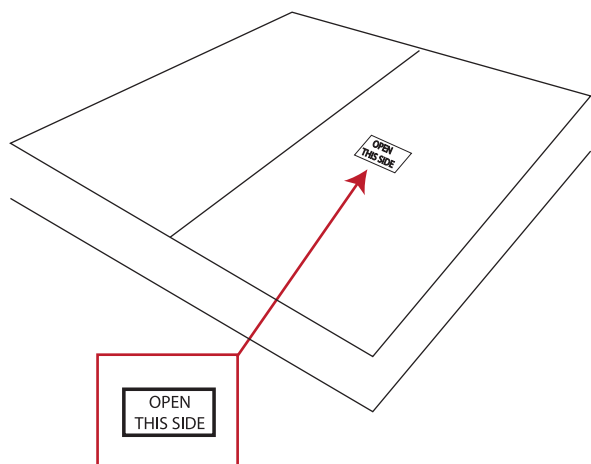

#### STEP 1

Ensure box is laid flat and opened from the correct side.

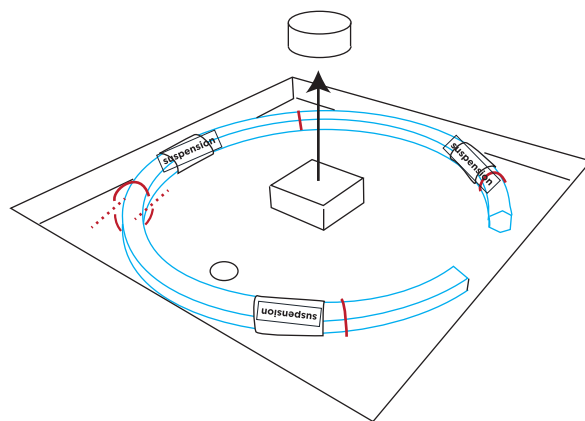


DO NOT REMOVE BLUE FORM UNTIL RING IS SUSPENDED

#### STEP 2

Remove canopy from centre of box. Release cable ties to remove pendant ring.

NOTE: This ring is packed to enable installation without removal of its protective packaging.

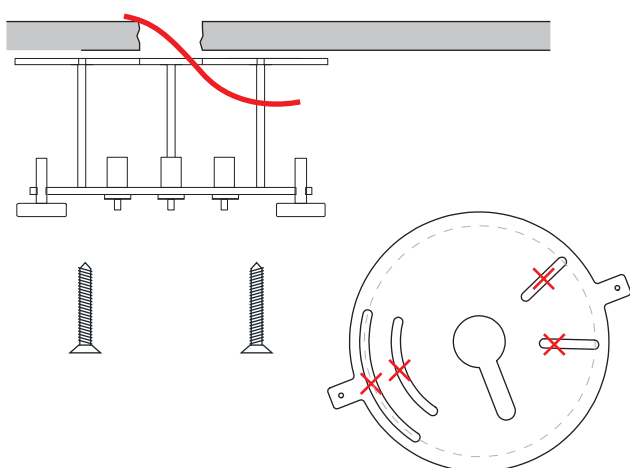

#### STEP 3

Securely fix the ceiling plate into a ceiling joist or beam using a minimum of 4 screws. Ensure the electrical cables pass through the cable feed. Ensure the fixing is capable of taking the relevant weight.

NOTE: SCREW FIXINGS ARE NOT SUPPLIED

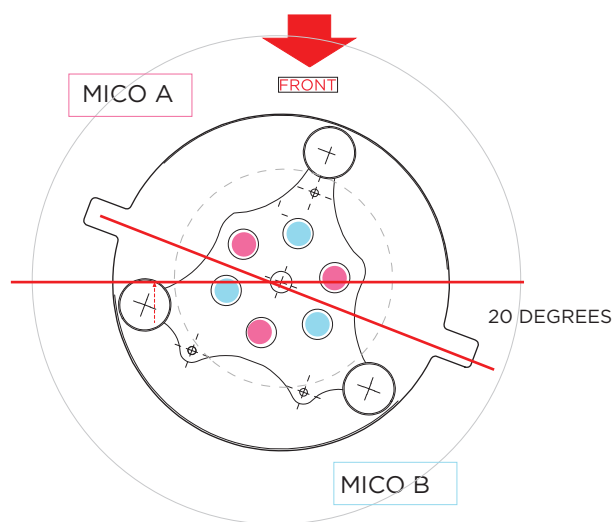



Illustration shows the view looking up at the ceiling plate. See also page 4 for an indication of orienting the rings relative to each other.

# MICO II PENDANT

## INSTALLATION INSTRUCTIONS


### 3 OF 6

BARONCELLI ⌘

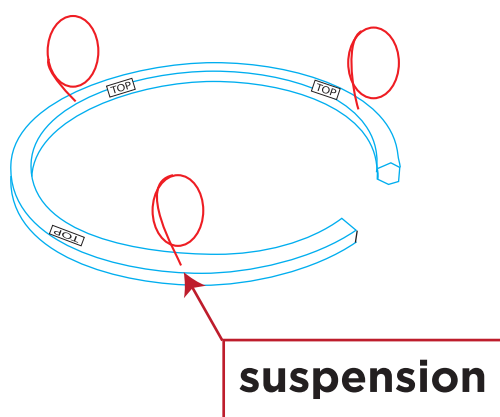


#### STEP 4

Remove film to access suspension cables. Ensure the ring is correctly orientated.

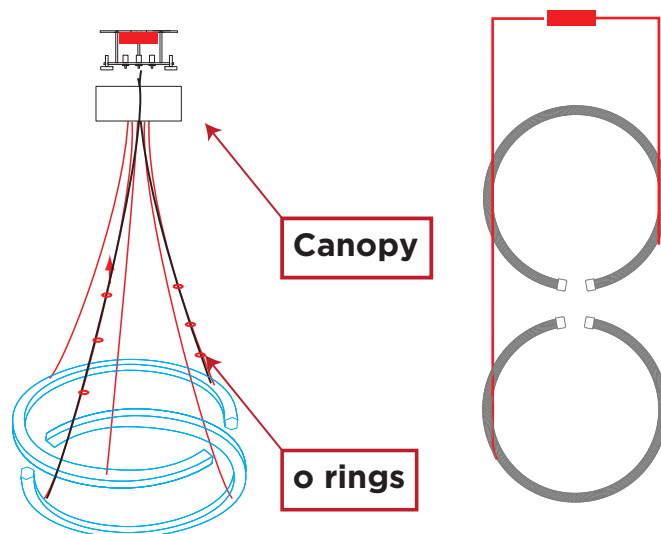


#### STEP 5

Pass the electrical cable through the ceiling fitting and make electrical connection to the driver. Remove protection packaging from the ring.

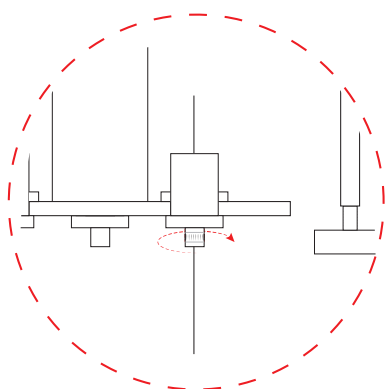

#### GRIPPER AND SAFETY CAP

Each gripper will have a safety cap which needs to be unscrewed a little in order to allow the cable. To shorten a cable simply feed the cable back up into the gripper. To lengthen a cable push the loosened cap upwards and the gripper will disengage allowing the cable to pass through it.

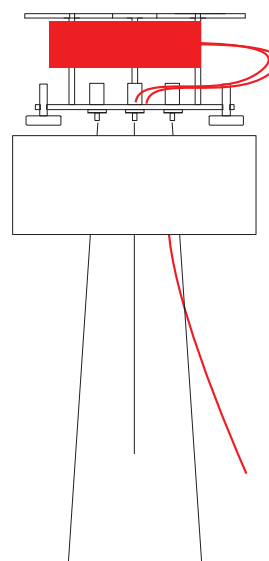

#### STEP 6


Secure ceiling canopy.

# MICO II PENDANT


## INSTALLATION INSTRUCTIONS

### 4 OF 6

BARONCELLI ⌘

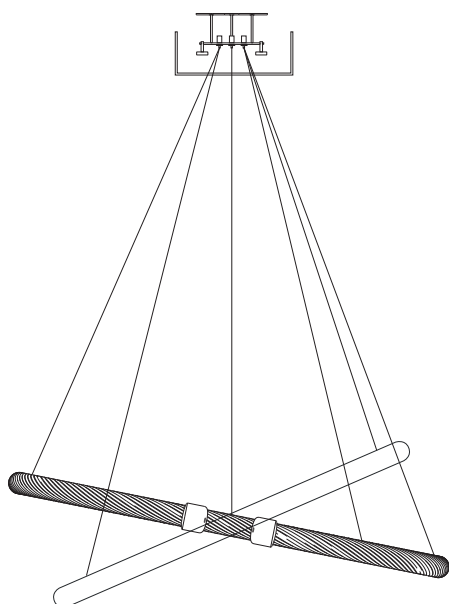

**STEP 6**  
Adjust the heights.

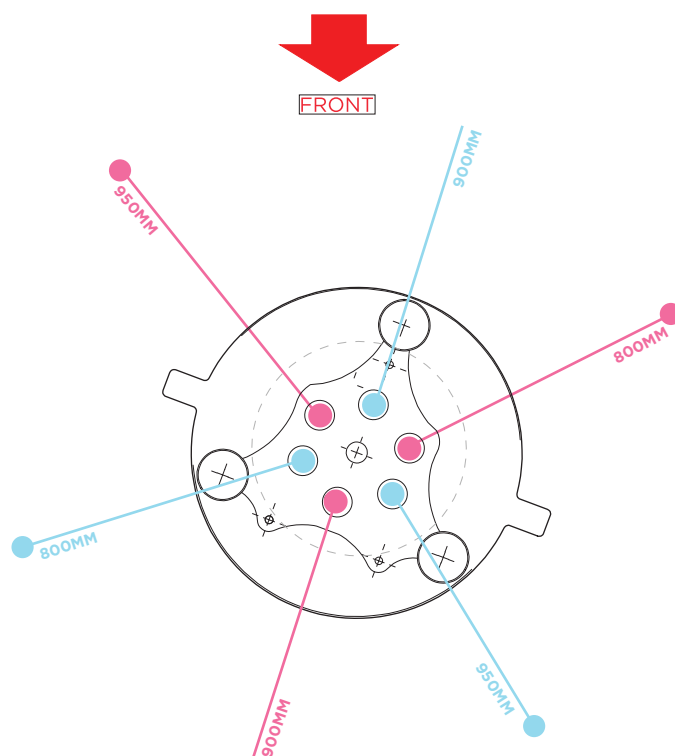


**NOTE:** ● ●  
INDICATES ENDCAPS (GAP SIDE)  
O.A DROP OF 1000MM (APPROX)  
FURTHER ADJUSTMENTS CAN BE  
MADE THEREAFTER.

\*ENSURE ANY ELECTRICAL WORK IS CARRIED OUT BY A QUALIFIED ELECTRICIAN\*

# OPERATION AND MAINTENANCE


## 5 OF 6

BARONCELLI ⌘

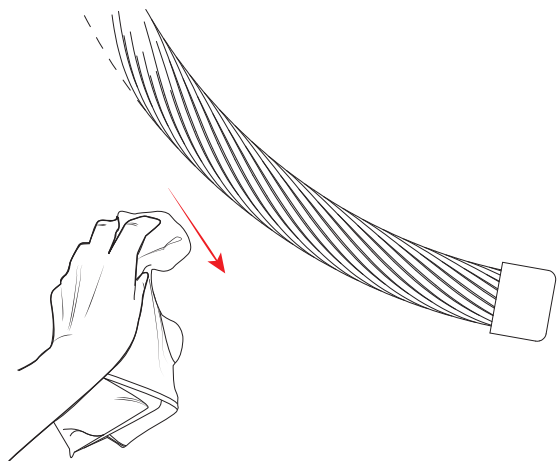



### GLASS CLEANING

Glass elements should be carefully cleaned using a soft cloth.

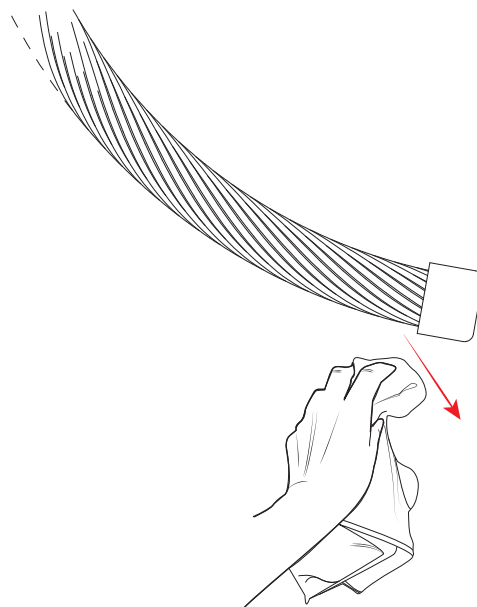

### METAL CLEANING

Carefully clean metal surfaces using a soft cloth and no liquid.

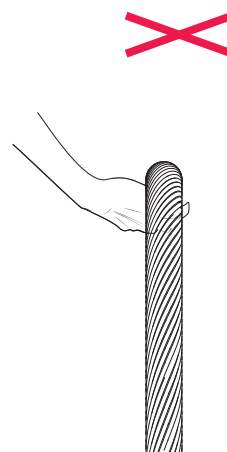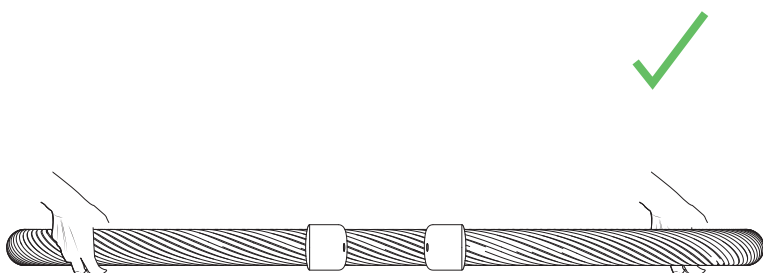

### HANDLING


Hold ring flat at all times, do not hold at an angle from the glass as this will put pressure on the LED tape.

\*ENSURE ANY ELECTRICAL WORK IS CARRIED OUT BY A QUALIFIED ELECTRICIAN\*


# OPERATION AND MAINTENANCE

## 6 OF 6


# BARONCELLI ⌘

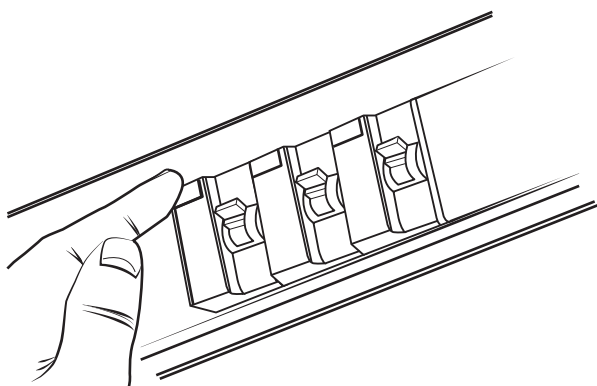

**STEP A**  
**TROUBLE SHOOTING - ELECTRICAL FAULTS**  
Check fusebaord

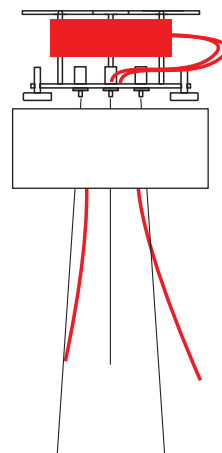

**STEP B**  
**TROUBLE SHOOTING - ELECTRICAL FAULTS**  
Lower ceiling canopy. Check/test connections.

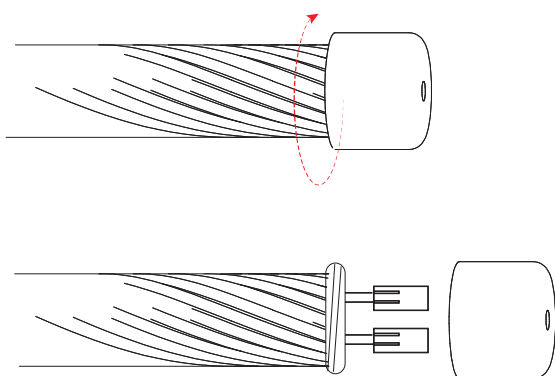

**STEP C**  
**TROUBLE SHOOTING - ELECTRICAL FAULTS**  
Remove the cap and check electrical connection.