


SATURNO II LED PENDANT

INSTALLATION INSTRUCTIONS

1 OF 6

BARONCELLI ⌘

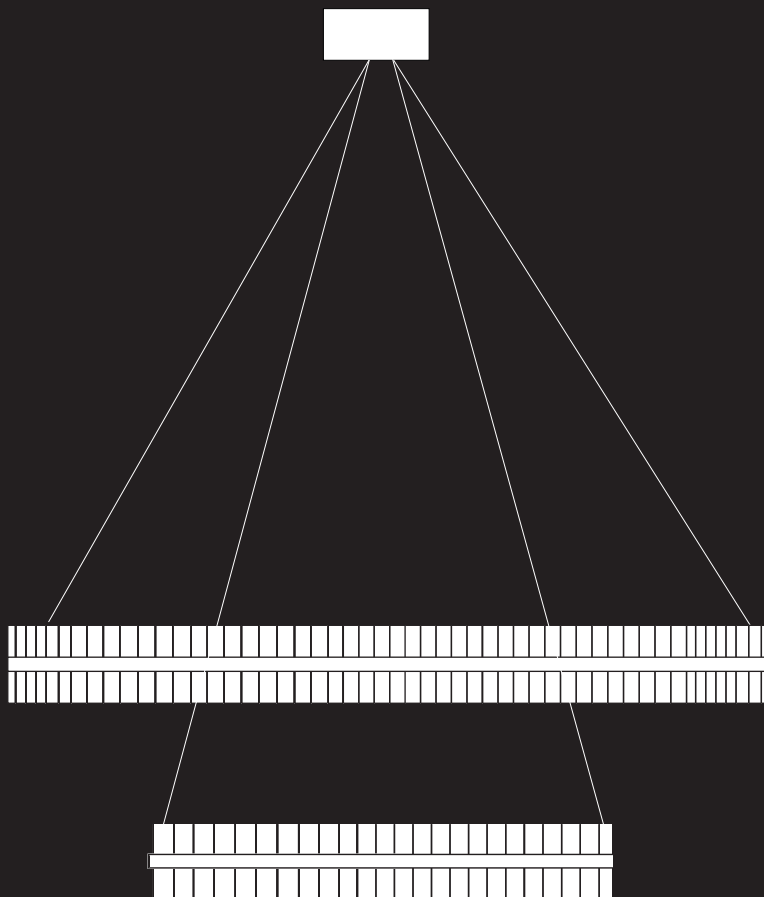

WHAT IS INCLUDED

1. Ceiling canopy
2. Suspension cable
3. Spares
4. Angle gripper (1200 DIA)

WEIGHTS

1000 DIA	22kg (48LB)
1200 DIA	27kg (59LB)

WHAT YOU WILL NEED

1. Screws
2. Screwdriver (3.5mm / 1/8" flat tip) + pliers
3. Soft cloth


SATURNO ii LED PENDANT

INSTALLATION INSTRUCTIONS


2 OF 6

BARONCELLI ⌘

***ENSURE THE MAINS POWER IS
TURNED OFF UNTIL FINAL TEST**

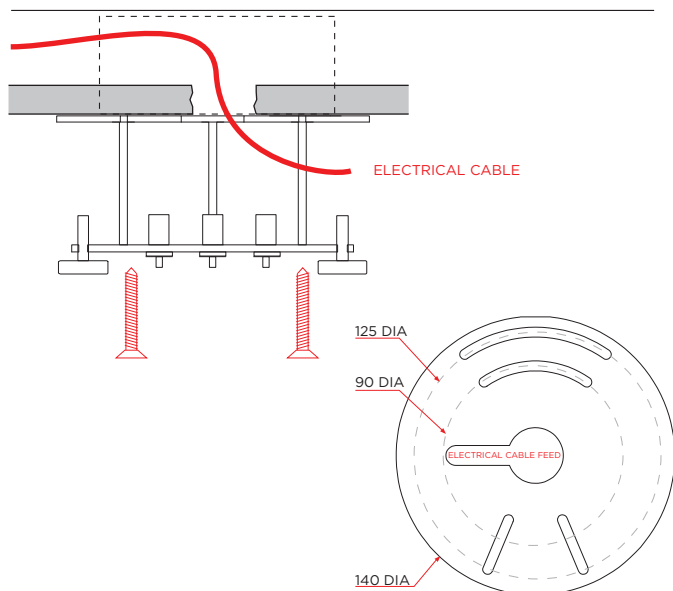

***ENSURE ANY ELECTRICAL WORK IS
CARRIED OUT BY A QUALIFIED ELECTRICIAN**

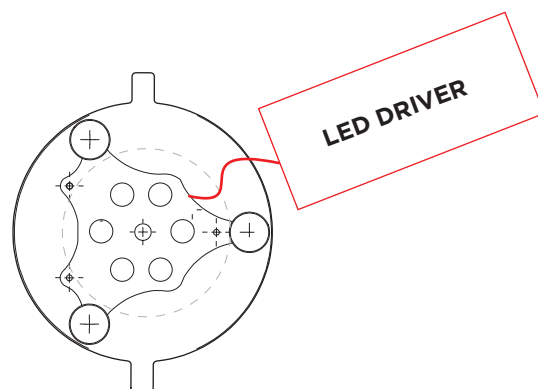


STEP 1

Securely fix the ceiling plate into a ceiling beam/joist (or Junction box for US) using a minimum of 4 fixings. Ensure the fixings are capable of taking the relevant weight.


NOTE: SCREW FIXINGS ARE NOT SUPPLIED

STEP 2

Connect main electrical cable to the transformers and slide into the plate.

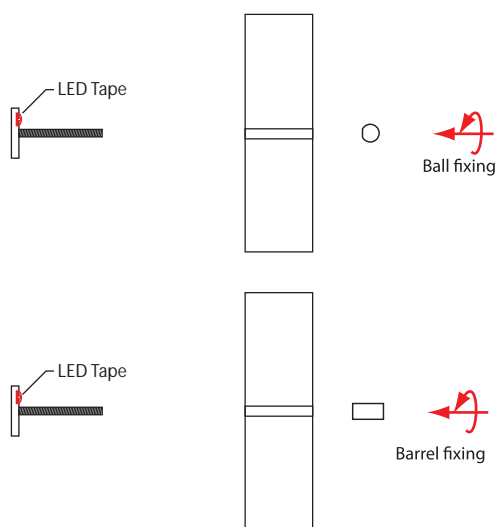

- Electrical connection cylinder attached with barrel fixings
- ▼ Trihedrons attached with barrel fixings

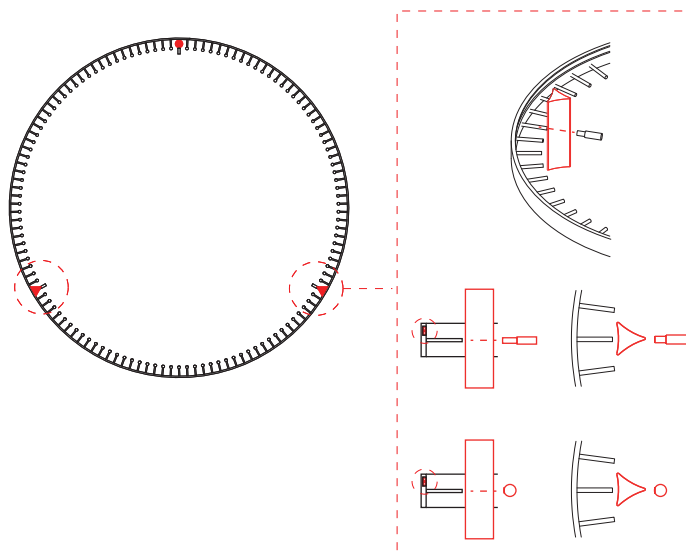

STEP 3


Slide a glass trihedron on with the point facing towards the centre of the frame. Secure in place using a ball / barrel fixing.

SATURNO II LED PENDANT

INSTALLATION INSTRUCTIONS


3 OF 6

BARONCELLI ⌘

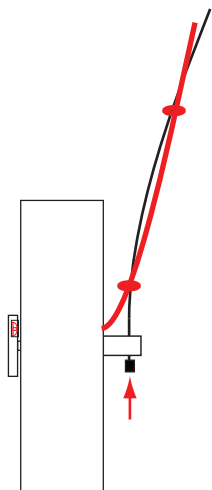


STEP 4-a

Pass suspension cables through the barrel fixings. The suspension cable from electrical housing barrel also need to pass through silicone O rings. The barrel fixing must be orientated such that the cable hole is pointing up/down, the fixing may therefore require loosening slightly to achieve this.

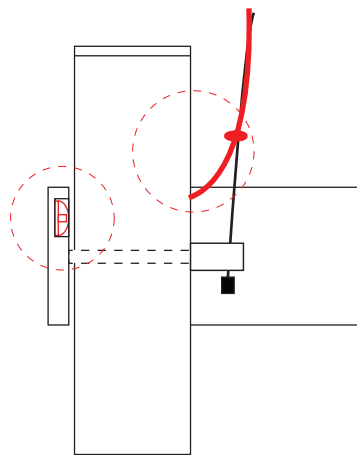


STEP 4-b

Ensure the LED tape is positioned above the pins and electrical connection feed is located at upper part of the cylinder.

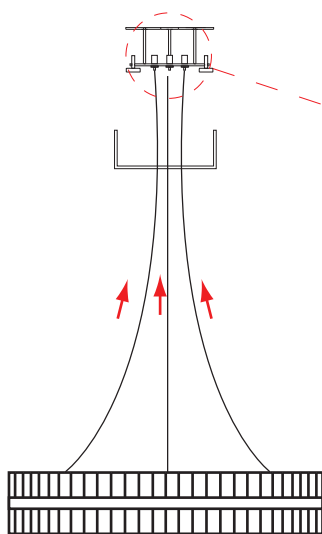

STEP 5

Pass three suspension cables up through the ceiling canopy and into the gripper units. Tighten screw caps to lock grippers.

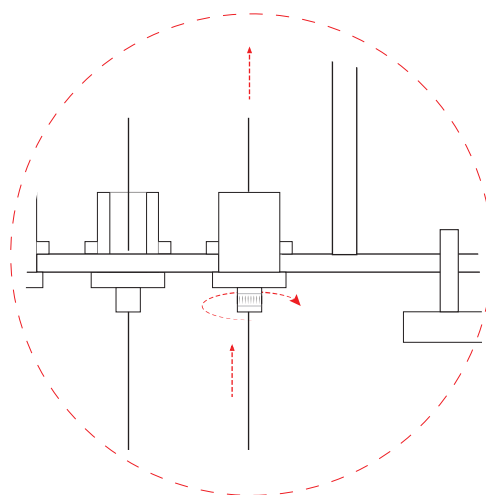

GRIPPER AND SAFETY CAP


Each gripper will have a safety cap which needs to be unscrewed a little in order to allow the cable. To shorten a cable simply feed the cable back up into the gripper. To lengthen a cable push the loosened cap upwards and the gripper will disengage allowing the cable to pass through it.

SATURNO II LED PENDANT

INSTALLATION INSTRUCTIONS


4 OF 6

BARONCELLI ⌘

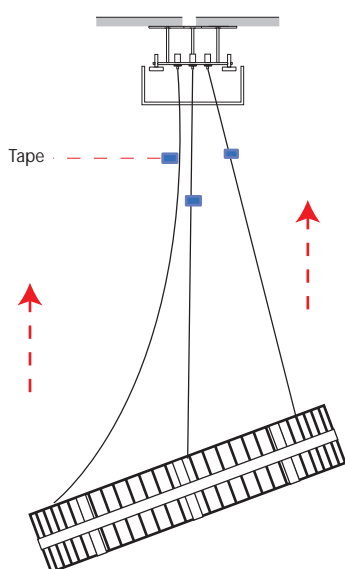


STEP 6 LEVELING

Pre measure the desired height and use tapes for indications.

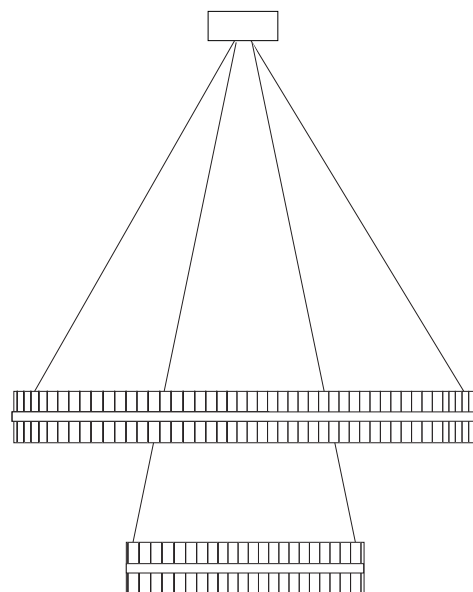

STEP 7

Install the second ring. Repeat from STEP 6. Adjust the height as required.

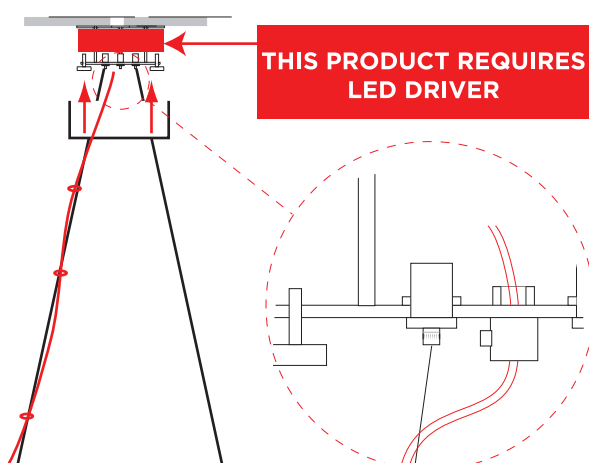

STEP 8


Pass electrical cable up along suspension cable through rubber rings, make electrical connection to LED driver. Secure driver in place and raise canopy to cover. Test LED.

ENSURE ANY ELECTRICAL WORK IS CARRIED OUT BY A QUALIFIED ELECTRICIAN

OPERATION AND MAINTENANCE


5 OF 6

BARONCELLI ⌘

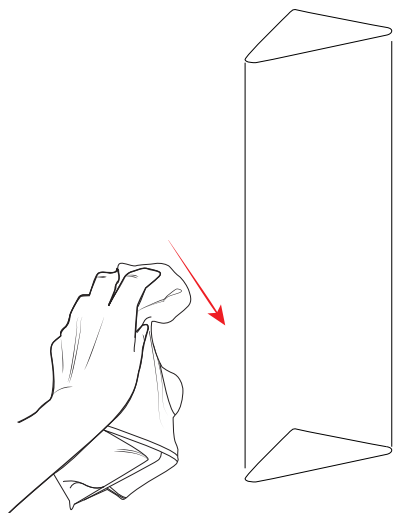


GLASS CLEANING

Glass elements should be carefully cleaned using a soft cloth.

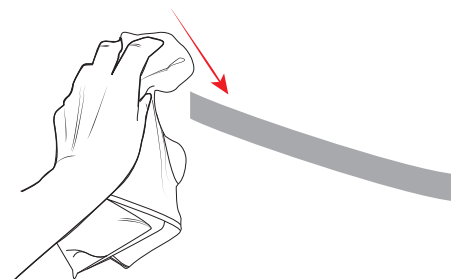



METAL CLEANING

Carefully clean metal surfaces using a soft cloth and no liquid.



LED TAPE

Do not touch or put pressure on the LED tape.

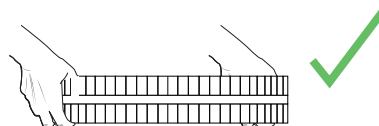

HANDLING


Hold ring flat at all times, do not hold at an angle from the glass as this will put pressure on the LED tape.

OPERATION AND MAINTENANCE

ENSURE ANY ELECTRICAL WORK IS CARRIED OUT BY A QUALIFIED ELECTRICIAN


6 OF 6

BARONCELLI ⌘

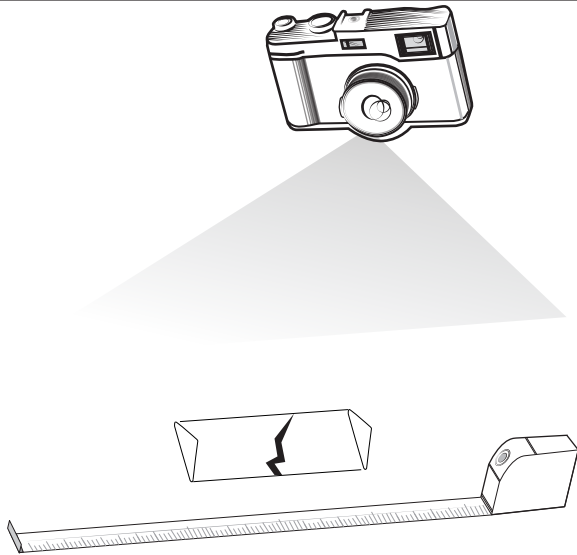

PHOTOGRAPH THE BREAKAGE

Ensure a clear side on image with a measuring tape along the breakage for scale is taken.

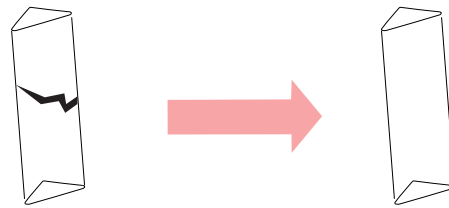

IDENTIFY MATCHING COMPONENT

If possible, find matching component to take measurements from. i.e an arm or a cup.