


SATURNO III INSTALLATION

INSTALLATION INSTRUCTIONS

1 OF 10

BARONCELLI ⌘

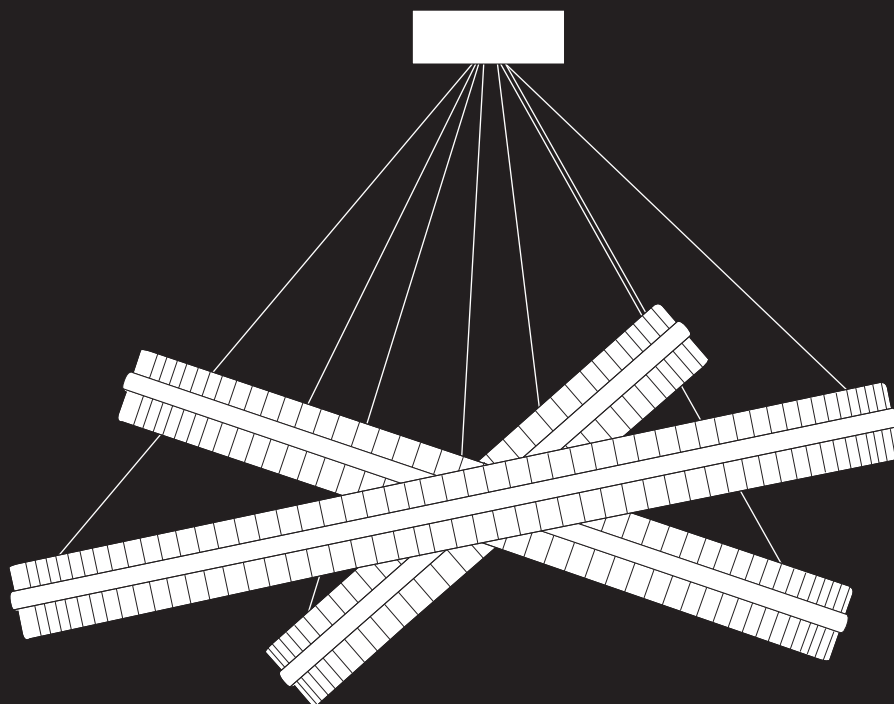

WHAT IS INCLUDED

1. Ceiling canopy
2. Suspension cable
3. Silicone tape
4. Spares
5. Angle gripper (1200 DIA)

WHAT YOU WILL NEED

1. Screws
2. Screwdriver (3.5mm / 1/8" flat tip) + pliers
3. Soft cloth

WEIGHT

SMALL	32kg (71lb)
LARGE	42kg (92lb)


SATURNO III LED INSTALLATION

INSTALLATION INSTRUCTIONS

2 OF 10

BARONCELLI ⌘

FACING FRONT - AS PER IMAGE

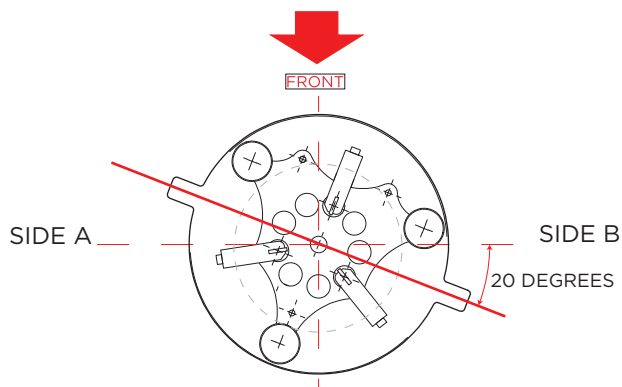


STEP 1

Before fixing the ceiling plate in place, rotate and align the grippers as per diagram.

NOTE:

Arrow indicates viewing position for image on front cover. See page 5 for enlarged illustration.



Illustration shows the view looking up at the ceiling plate.

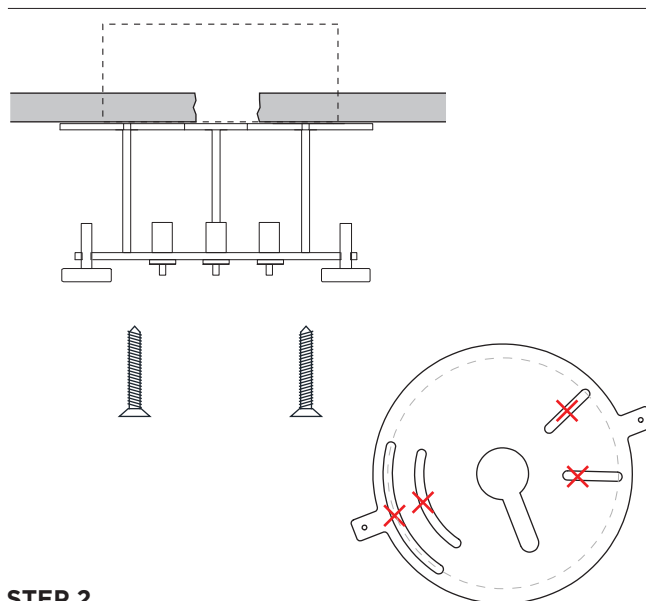

STEP 2

Securely fix the ceiling plate into a ceiling beam/joist. (or Junction box for US) Ensure the electrical cables pass through the cable feed. Ensure the fixing is capable of taking the relevant weight.

NOTE: SCREW FIXINGS ARE NOT SUPPLIED

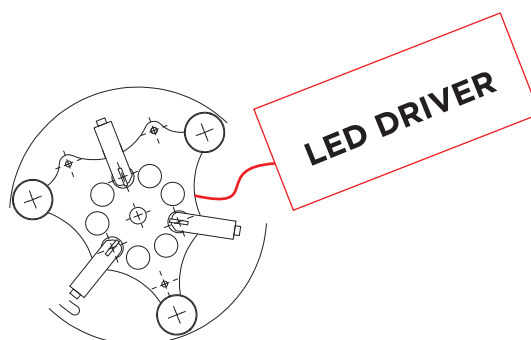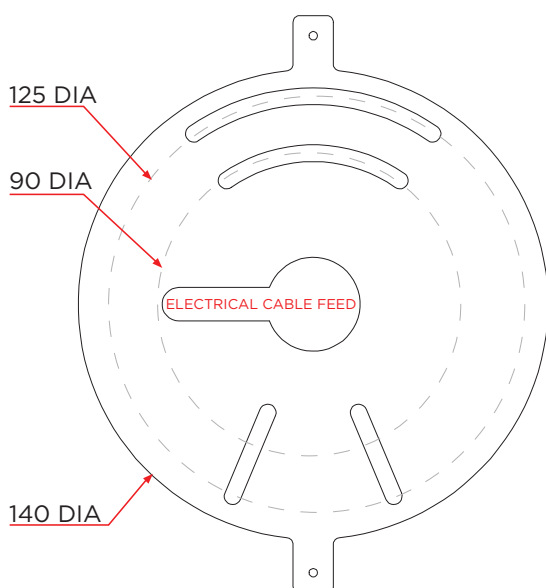

STEP 3


Connect main electrical cable to the transformers and slide into the plate.

SATURNO III LED INSTALLATION


INSTALLATION INSTRUCTIONS

3 OF 10

BARONCELLI ⌘


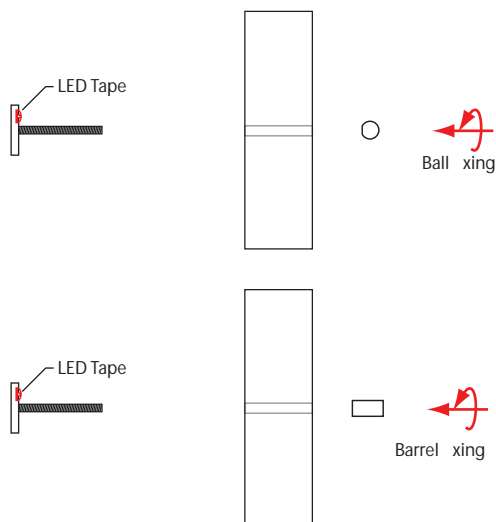


- Electrical connection cylinder attached with barrel fixings
- ▼ Trihedrons attached with barrel fixings

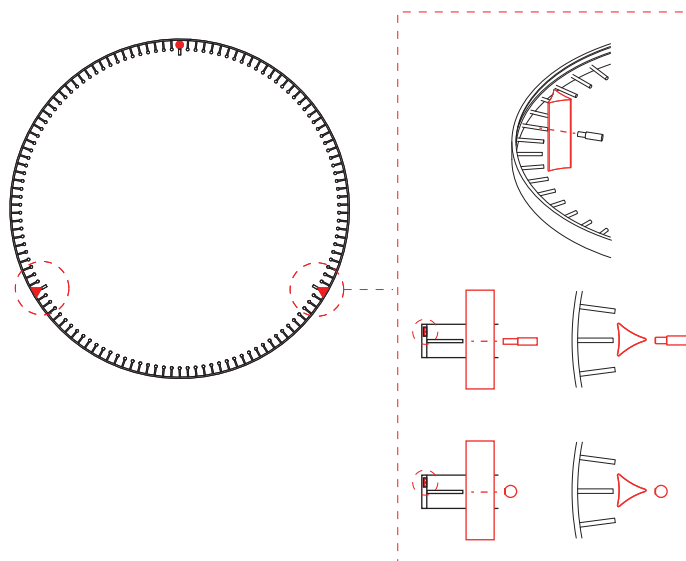

STEP 4

Slide a glass trihedron on with the point facing towards the centre of the frame. Secure in place using a ball / barrel fixing.

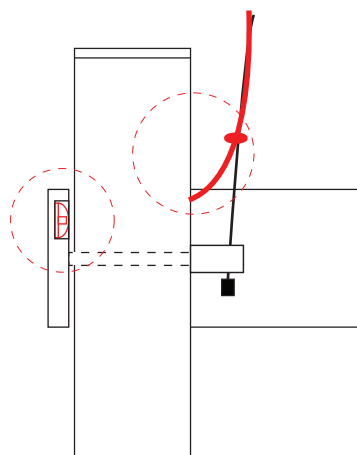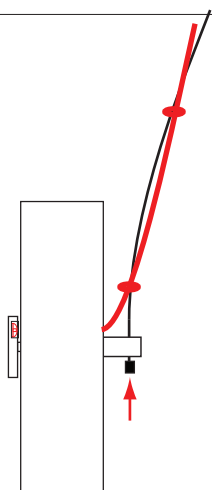

STEP 5

Pass suspension cables through the barrel fixings. The suspension cable from electrical housing barrel also need to pass through silicone O rings. The barrel fixing must be orientated such that the cable hole is pointing up/down, the fixing may therefore require loosening slightly to achieve this.

STEP 6


Ensure the LED tape is positioned above the pins and electrical connection feed is located at upper part of the cylinder.

SATURNO III LED INSTALLATION

INSTALLATION INSTRUCTIONS


4 OF 10

BARONCELLI ⌘

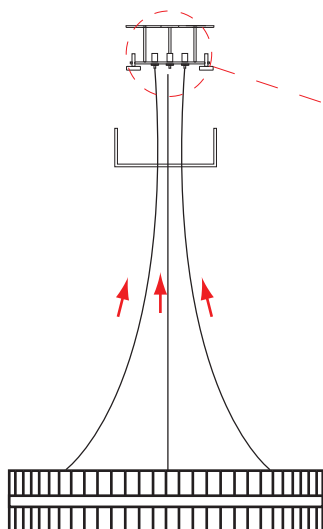


STEP 7

Pass the three suspension cables up through the ceiling canopy and into the gripper units. Tighten screw caps to lock grippers.

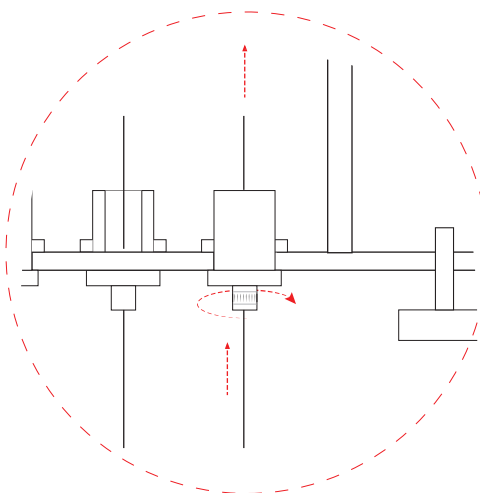


GRIPPER AND SAFETY CAP

Each gripper will have a safety cap which needs to be unscrewed a little in order to allow the cable. To shorten a cable simply feed the cable back up into the gripper. To lengthen a cable push the loosened cap upwards and the gripper will disengage allowing the cable to pass through it.

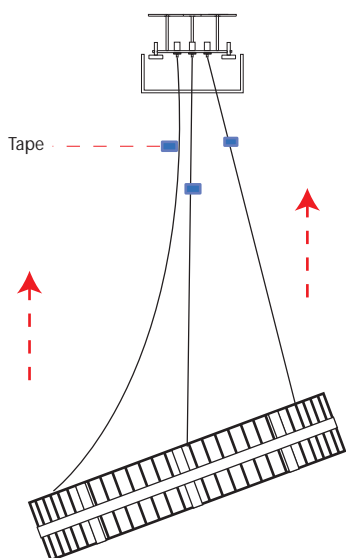

LEVELING

Measure and mark with tapes to indicate desired height.

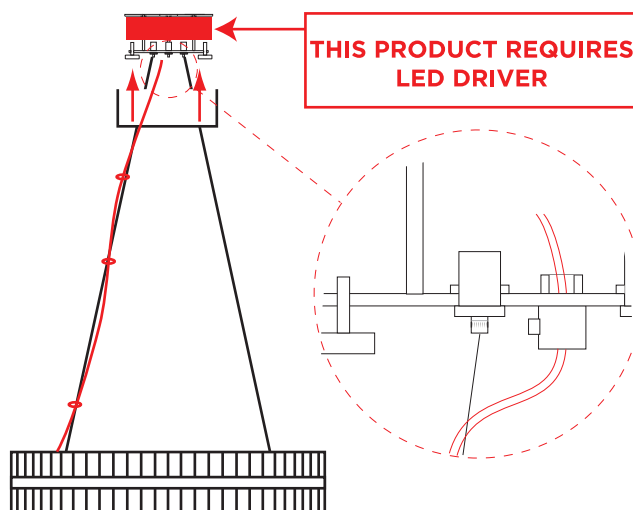

STEP 8

Pass electrical cable up along suspension cable through rubber rings, make electrical connection and securing driver in place. Raise canopy to cover.


SATURNO III LED INSTALLATION
INSTALLATION INSTRUCTIONS
5 OF 10

BARONCELLI ⌘

FACING FRONT - AS PER IMAGE

ILLUSTRATION SHOWS THE VIEW OF LOOKING UP AT THE CEILING PLATE.

SATURNO III LARGE

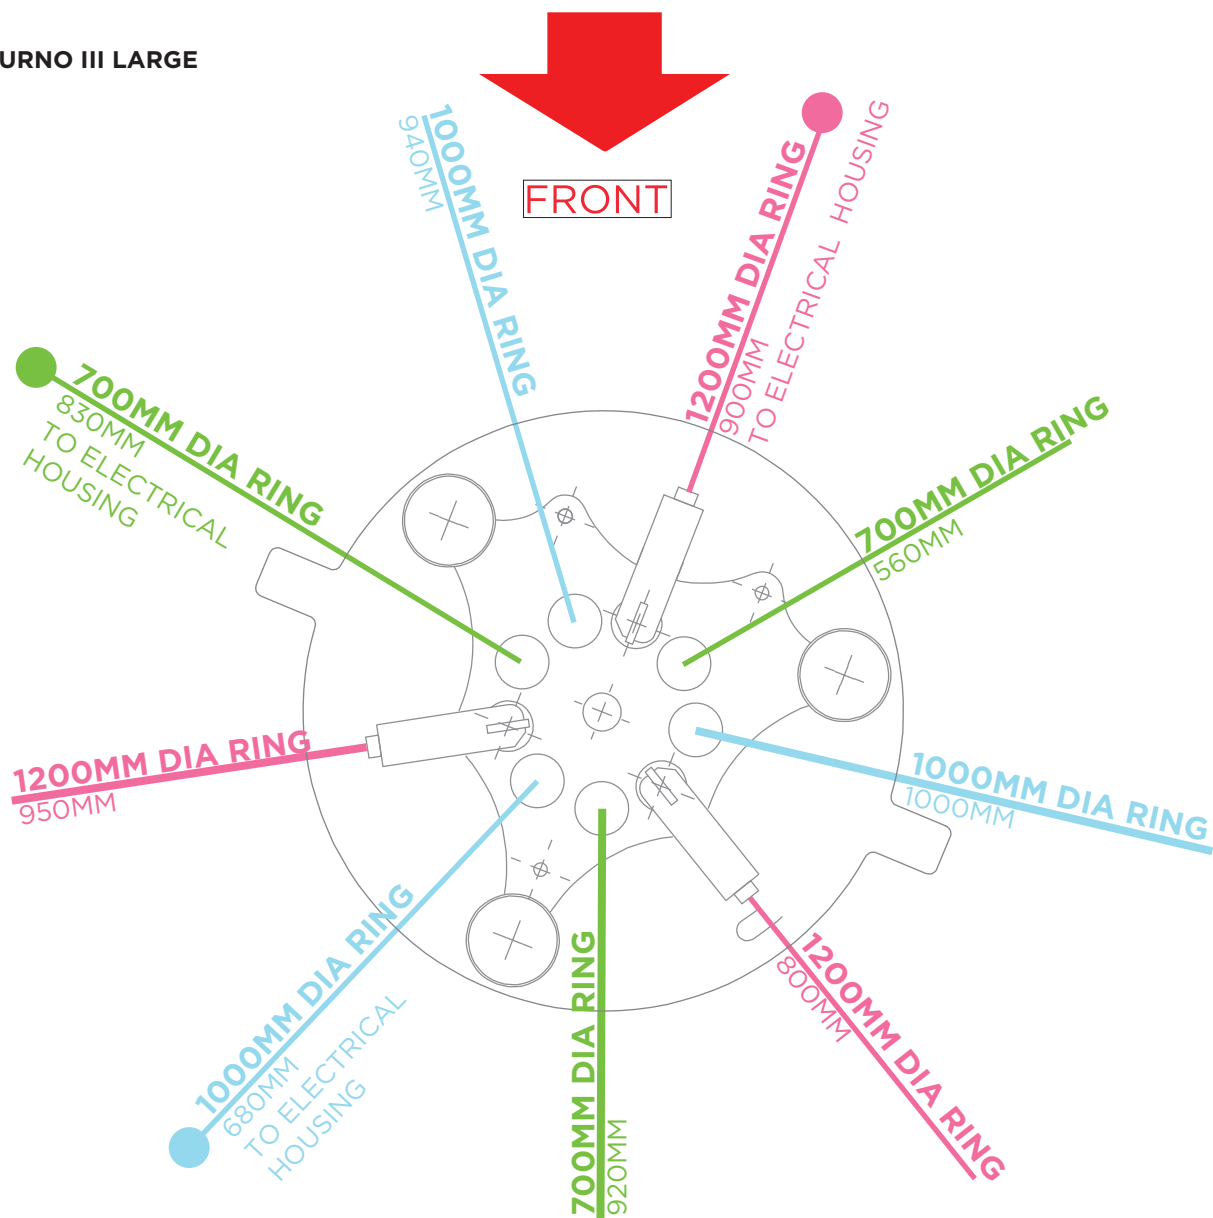

NOTE:
ARROW INDICATES VIEWING POSITION
FOR IMAGE ON FRONT COVER.

NOTE:
O.A DROP OF 1100MM (APPROX)
FURTHER ADJUSTMENTS CAN BE
MADE THEREAFTER.

SATURNO III LED INSTALLATION


INSTALLATION INSTRUCTIONS

6 OF 10


BARONCELLI

ASSEMBLY ORDER

NORMAL GRIPPER

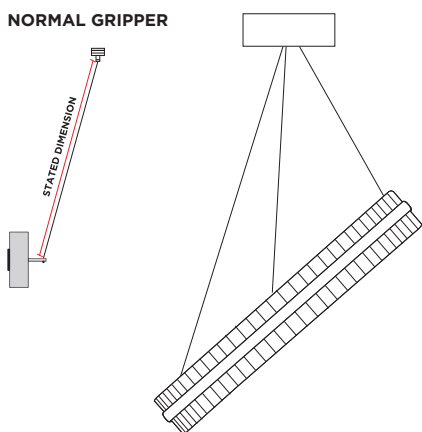


NORMAL GRIPPER

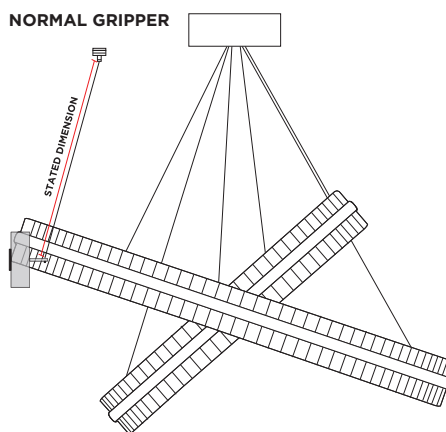

1. 700 DIAMETER RING


Fix this ring first to the ceiling plate.

ANGLED GRIPPER FOR THE LARGEST RING

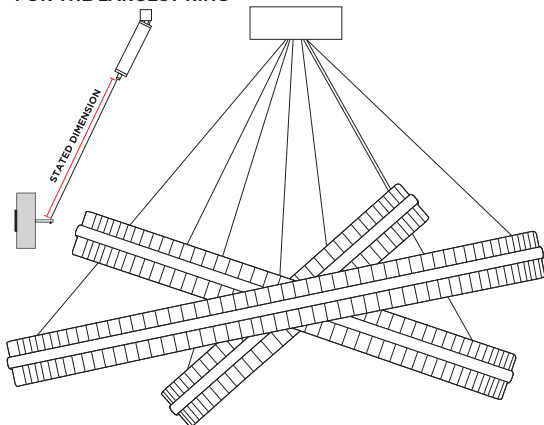

2. 100 DIAMETER RING

Fix this ring second to the ceiling plate.

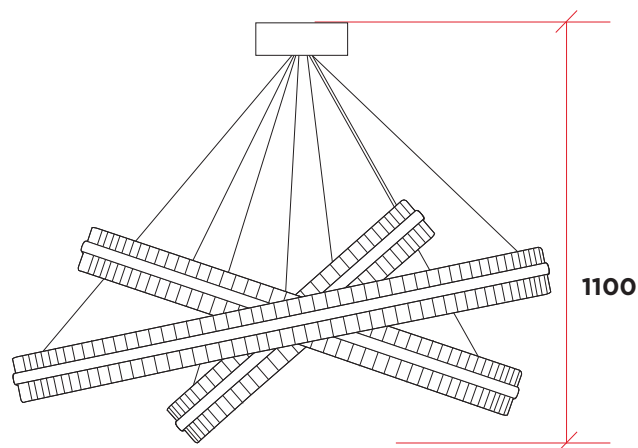

3. 1200 DIAMETER RING

Fix this ring last to the ceiling plate.

NOTE:

O.A DROP OF 1100MM (APPROX) FURTHER
ADJUSTMENTS CAN BE MADE THEREAFTER.

SATURNO III SMALL INSTALLATION - SCHEMATIC

INSTALLATION INSTRUCTIONS


7 OF 10

BARONCELLI ⌘

FACING FRONT - AS PER IMAGE

ILLUSTRATION SHOWS THE VIEW OF LOOKING UP AT THE CEILING PLATE.

SATURNO III SMALL

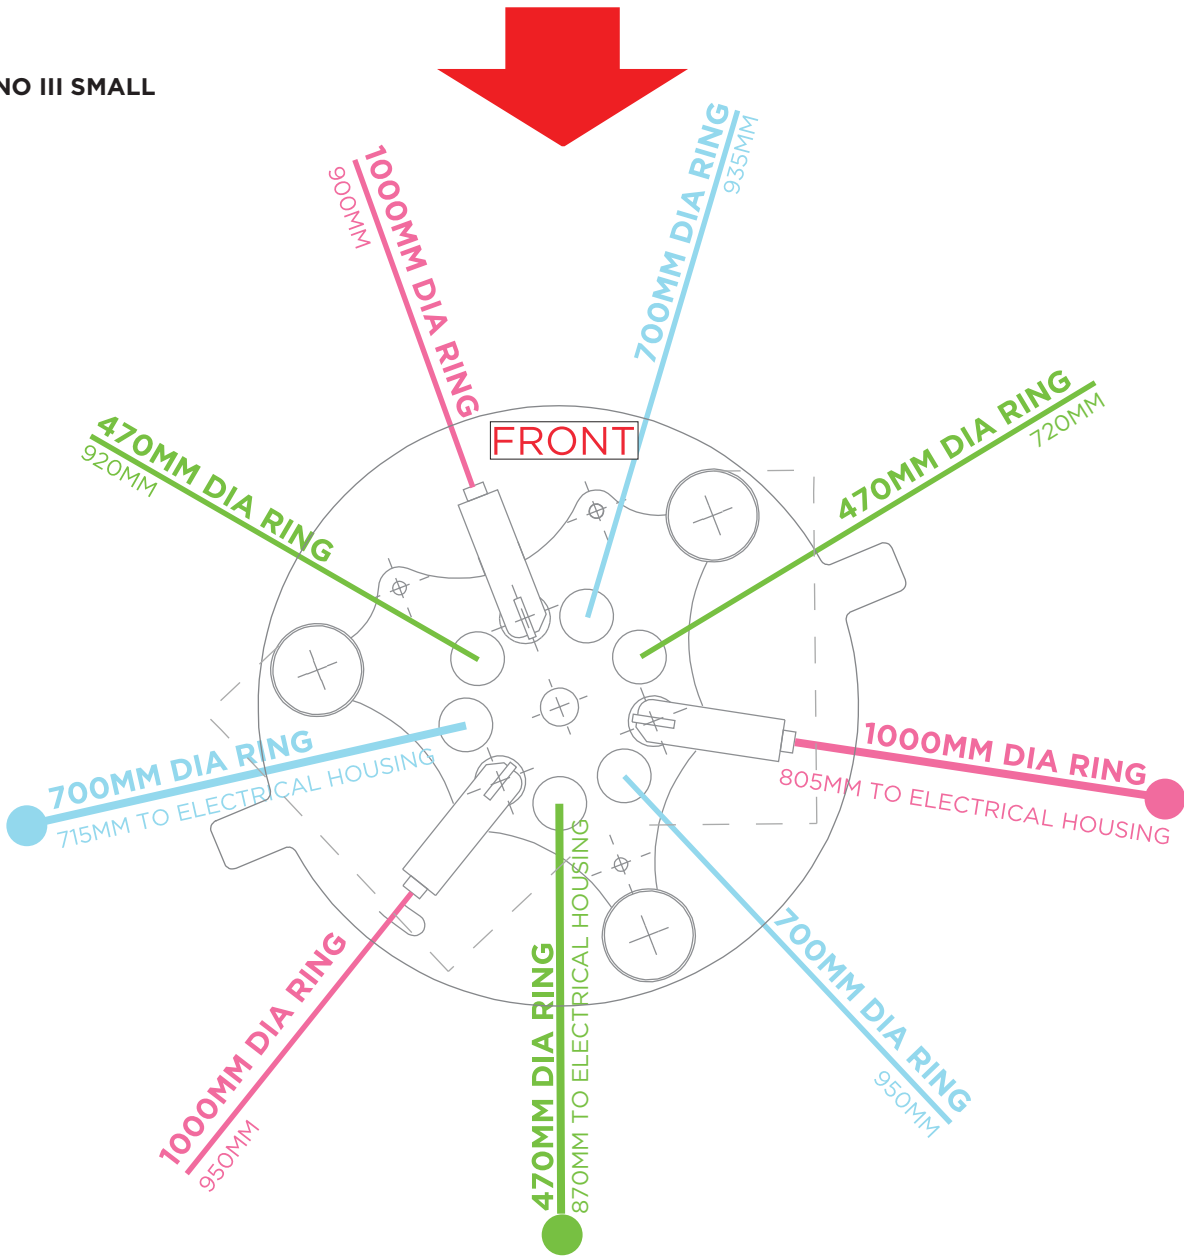

NOTE:
ARROW INDICATES VIEWING POSITION
FOR IMAGE ON FRONT COVER.

NOTE:
O.A DROP OF 1100MM (APPROX)
FURTHER ADJUSTMENTS CAN BE
MADE THEREAFTER.

SATURNO III SMALL INSTALLATION - SCHEMATIC


INSTALLATION INSTRUCTIONS

8 OF 10


BARONCELLI ®

ASSEMBLY ORDER

NORMAL GRIPPER

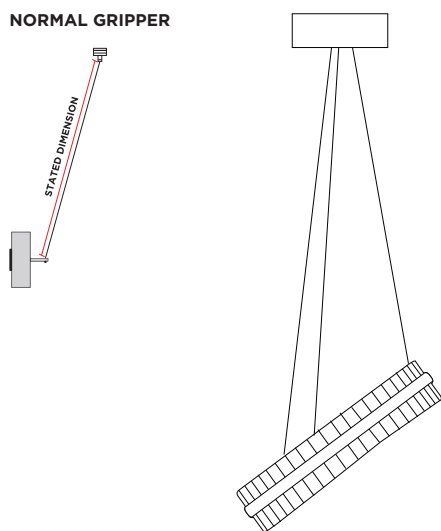


NORMAL GRIPPER

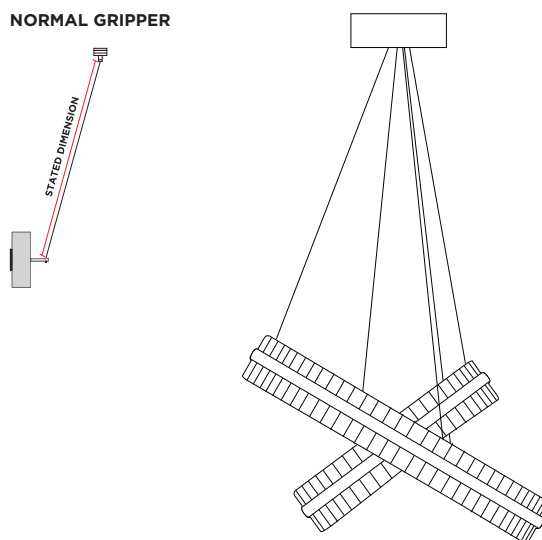

1. 470 DIAMETER RING


Fix this ring first to the ceiling plate.

ANGLED GRIPPER FOR THE LARGEST RING

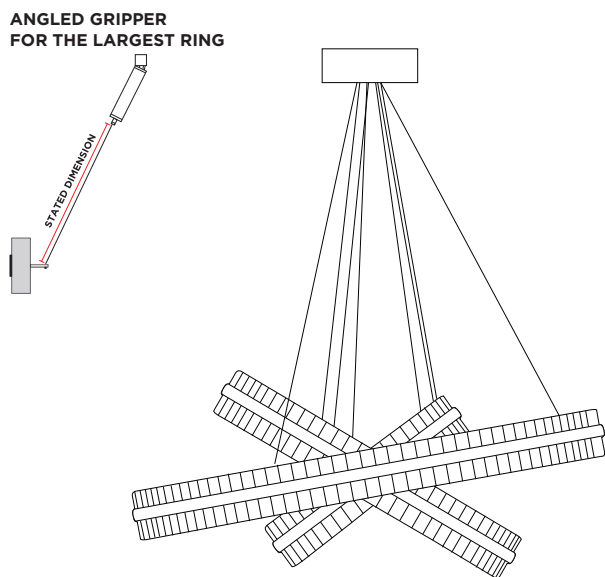

2. 700 DIAMETER RING

Fix this ring second to the ceiling plate.

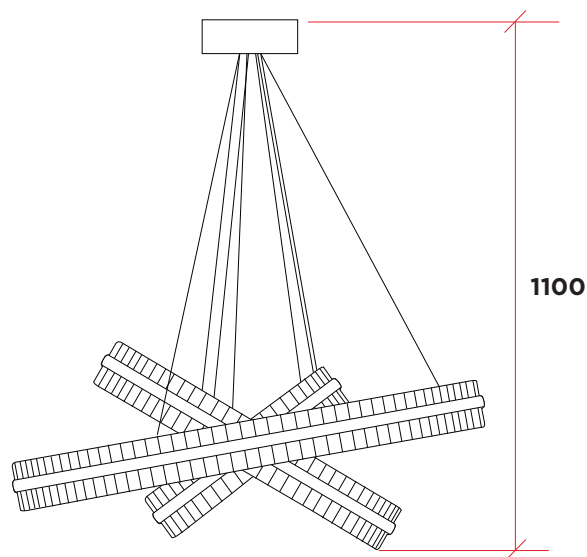

3. 1000 DIAMETER RING


Fix this ring last to the ceiling plate.

ENSURE ANY ELECTRICAL WORK IS CARRIED OUT BY A QUALIFIED ELECTRICIAN

OPERATION AND MAINTENANCE


9 OF 10

BARONCELLI ⌘

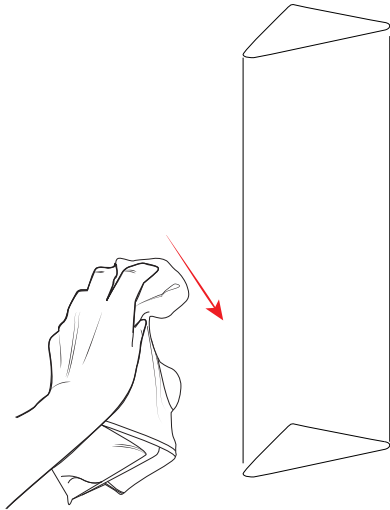


GLASS CLEANING

Glass elements should be carefully cleaned using a soft cloth.

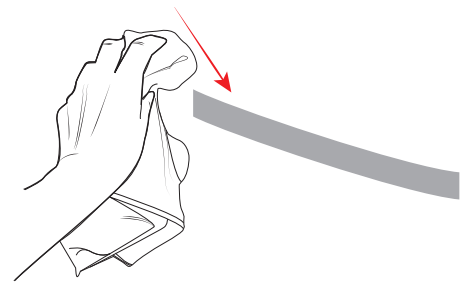



METAL CLEANING

Carefully clean metal surfaces using a soft cloth and no liquid.



LED TAPE

Do not touch or put pressure on the LED tape. Ensure silicone tapes are used as shown in the

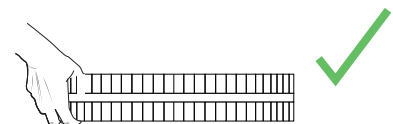


HANDLING

Hold ring flat at all times, do not hold at an angle from the glass as this will put pressure on the

ENSURE ANY ELECTRICAL WORK IS CARRIED OUT BY A QUALIFIED ELECTRICIAN


OPERATION AND MAINTENANCE

10 OF 10

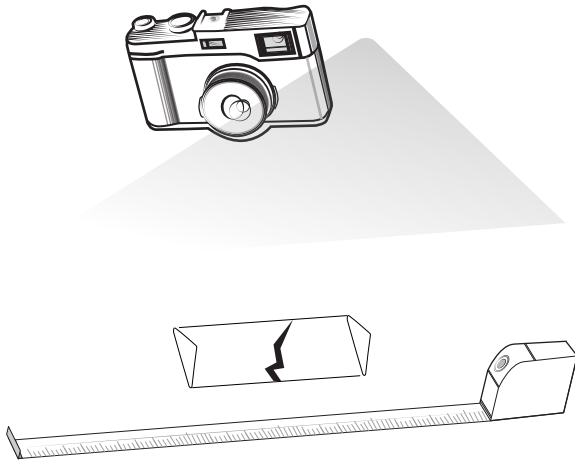


PHOTOGRAPH THE BREAKAGE

Ensure a clear side on image with a measuring tape along the breakage for scale is taken.

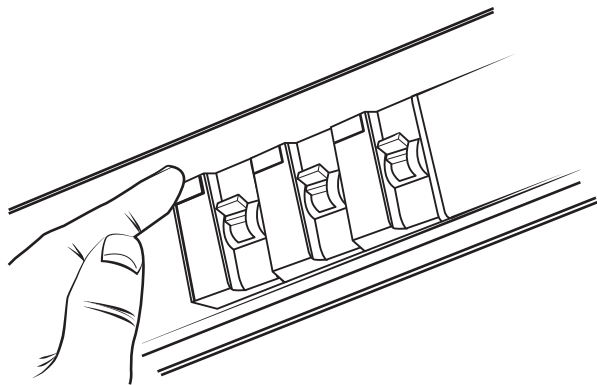


STEP A TROUBLE SHOOTING - ELECTRICAL FAULTS

Check fuseboard

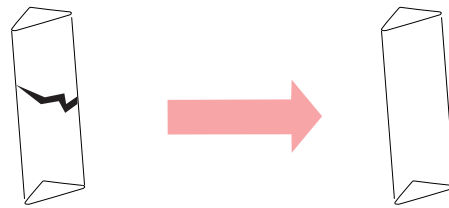

IDENTIFY MATCHING COMPONENT

If possible, find matching component to take measurements from. i.e an arm or a cup.

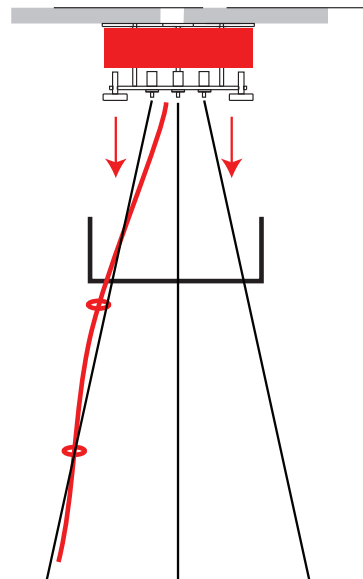

STEP B TROUBLE SHOOTING - ELECTRICAL FAULTS

Lower ceiling canopy. Check/test connections.